DRAFT RECREATION STUDY TECHNICAL REPORT

WEBER HYDROELECTRIC PROJECT RELICENSING FERC PROJECT NO. 1744

Prepared for

PacifiCorp Hydro Resources 1407 West North Temple, Room 110 Salt Lake City, Utah 84116

Prepared by

Cirrus Ecological Solutions 965 South 100 West, Suite 200 Logan, Utah 84321 (435) 787-1490 www.cirruses.com This page intentionally left blank

CONTENTS

Introduction
Nexus to Project
Project Area
Study Area
Background Information
Methods
Results
Recreation Supply Analysis
Recreation Use and Demand Analysis88
Whitewater Boating Feasibility Study
Recreation Needs Analysis
APPENDICES Appendix A - Site Photos Appendix B - Visitor Survey Questionnaire and Results Appendix C - Whitewater Technical Report
TABLES
Table 1. Recreation amenities at the Weber Hydroelectric Project site
Table 2. Recreation use metric estimates for the Weber recreation site. 99
Table 3. Analysis of primitive trail users by use type. Based on data from remote camera <u>1010</u>
FIGURES
Figure 1. Weber Hydro Relicensing Project Location.
Figure 2. Mean Daily Flows in the Project Study Reach in 2015 and 2016

i

INTRODUCTION

PacifiCorp, a subsidiary of Berkshire Hathaway Energy, plans to file an application for relicensing of the Weber Hydroelectric Project (Project), Federal Energy Regulatory Commission (FERC or Commission) Project No. 1744, on the Weber River in Weber, Morgan, and Davis counties in Utah. The current license will expire on May 31, 2020. The Project has a generation capacity of 3.85 megawatts and is located partially on federal lands managed by the USDA-Forest Service (USFS), and partially on lands owned by the Union Pacific Railroad Company (UPR). PacifiCorp filed a Notice of Intent to File Application for New License and a Pre-Application Document to initiate FERC's Alternative Licensing Process <u>for</u> the Project on May 29, 2015.

This document is a recreation resource study technical report to meet FERC licensing requirements and address study requests from American Whitewater (AW), Trout Unlimited (TU), and the Utah Division of Wildlife Resources (UDWR). The study includes the following four components: 1) an inventory of existing recreation facilities and opportunities in the Project vicinity, 2) a recreation use and demand study, 3) a phased whitewater boating feasibility study, and 4) a recreation needs assessment. Note that the *Whitewater Technical Report* is summarized in the body of this report and included in full text as Appendix C.

According to the approved study plan, the study has two principal objectives:

- Characterize existing recreation opportunities and use levels (including those for whitewater boating) in the Project vicinity. Existing recreation facilities and opportunities (recreation resource supply) in the Project vicinity will be identified and mapped. Use of recreation facilities in and near the Project Study Area (recreation resource demand) including the existing day-use Weber recreation ssite will be summarized based on use data, if available, or estimates.
- Identify both existing and future recreation needs (including those for whitewater boating) related to the Project over the term of the new license. Existing needs will be identified based on current use data and agency consultation. An estimate of future demand for recreation opportunities at the Project will be made.

NEXUS TO PROJECT

The Project has potential direct and indirect effects on recreation resources and use within and adjacent to the Project Area, including the affected reach of the river downstream from the dam. These effects include providing public access to natural open space areas within and surrounding the Project for a variety of recreation activities, and access to and use of the river, forebay and tailrace for recreation purposes as well as effects on river flows. PacifiCorp has developed and operates the existing Weber day-use recreation site. User-defined trails from the recreation site to the old highway to the west (crossing under I-84) allow unrecorded use of USFS and private lands during all seasons, most commonly for anglers. The forebay access road is used in all seasons to access the river both upstreamabove and downstream ofbelow the recreation site, again, most commonly for angling. The recreation site is used for picnicking, most commonly in late spring and summer, as the low sun angle (due to the narrow canyon walls) creates extended

and relatively cold and windy winter-like conditions that tend to discourage all but the most cold-hardy users.

Study results will help inform PacifiCorp, USFS, AW, TU, and other stakeholders by synthesizing the information collected during the recreation studies and defining existing and future recreation needs that can reasonably be addressed by the Project and that may be considered for implementation during a new license term.

PROJECT AREA

For the purposes of this document and the preceding Study Plans, the FERC Project Boundary (or Project Boundary) is defined as all lands and waters within the existing FERC Project Boundary for the Weber Hydroelectric Project No. 1744, as denoted on the Project's Exhibit G. The Project Area is the area which contains all Project features (encompassing the FERC Project Boundary as defined above), and which extends out for the purposes of characterization and analysis from the faurthest edge of the Project Boundary, and across the river to the far riverbank (including the river regardless of which side of the river the Project features are found), as shown in Figure 1.

STUDY AREA

The Study Area will-includes the Project Area as described above and shown on Figure 1 along the Weber River from the diversion dam to the powerhouse, including lands owned by the USFS or Union Pacific Railroad, as described in the Pre-Application DocumentAD. Note that the Study Area as defined includes the riverbank across from the powerhouse for review of that will be looked at as a potential boater take-out site (this area is within the existing FERC Project Boundary and is covered by PacifiCorp's USFS Special Use Permit for the Project, but is also located at the terminus of the access road leading to the Davis-Weber Irrigation Company's intake gates and related infrastructure).

BACKGROUND INFORMATION

The Project Area is located within Weber Canyon and is surrounded by USFS and UPR lands. The Uinta-Wasatch-Cache National Forest is adjacent to the highly populated and urbanized Wasatch Front, which stretches from Brigham City, Utah, south to Nephi and includes the state capital of Salt Lake City. The mouth of Weber Canyon is approximately 8 miles from the Ogden City center and 30 miles north of Salt Lake City. The western, or down canyon, edge of the Project Area is approximately 9 miles from the Ogden City center. Recreation is the dominant land use on surrounding USFS land and includes activities such as camping, hiking, fishing, picnicking, biking, snowmobiling, and cross-country and downhill skiing.

Weber Canyon itself offers opportunities for fishing in the Weber River and limited (due to the lack of safe and legal access) hiking along the canyon slopes. Approximately 1,500 feet east of the Project's diversion dam, on eastbound Interstate 84, the Utah Department of Transportation (UDOT) maintains a rest stop. The rest stop has restrooms, water, picnic tables, Americans with Disabilities Act (ADA) river access for handicapped persons, viewpoints, and irrigated landscaping. UDOT maintains another rest stop approximately 2 miles east of the Project Area.



Figure 1. Weber Hydro Relicensing Project Location.

The existing Weber recreation site is located on USFS land but is operated by PacifiCorp in the Project Area, immediately downstream from the Weber diversion dam. It includes a small parking area, five picnic tables, a lawn, fishing access to the river downstream of the dam, fishing access to the forebay with a platform for disabled personsthat meets ADA requirements, and a portable toilet that is available on a seasonal basis.

Based on the National Park Service's vehicle occupancy multiplier (2.4 during off-season and 2.7 during peak season) and vehicle count data from a counter located for a year at the entry to the Weber diversion dam and recreation site, PacifiCorp estimated that approximately 19,454 people visited the recreation site during 2014, with 13,687 visitors during the off season and 5,767 visitors during the peak season (the Friday before Memorial Day through Labor Day). Because these numbers are based on car count data only, no information exists regarding specific uses of the area by the visitors noted above during 2014.

Extensive angling use occurs in the bypass reach (i.e., the reach of the river between the dam and the powerhouse where flows are reduced when the Project is diverting water for power generation). UDWR completed a creel survey in the Weber River from the mouth of Weber Canyon upstream to the confluence with Lost Creek. An estimated 66,606 angler trips to this UDWR-assessed reach were made during 2013 (Nadolski and Penne, 2013, in draft). While the creel survey did not quantify the number of anglers specifically using the PacifiCorp bypass reach, it would be safe to assume that many of the estimated 19,454 visitors to the recreation site in 2014 were anglers, as public access to much of the remaining reach is limited.

While not designated as a Scenic Highway, Interstate 84 is popular for scenic driving, and at least one recreational loop drive crosses the Project Area. This recreational loop drive is popular for Ogden residents and involves taking Interstate 84 through Weber Canyon, past the Project Area's east end, turning north on Trappers Loop Road for 8 miles to Pineview Reservoir, and then returning to Ogden through Ogden Canyon via State Highway 39 along the Ogden River.

Although the Weber River overall offers one of the closest whitewater paddling opportunities for Wasatch Front boaters, whitewater boating opportunities within the Project Area are limited. The existing Class III-IV boatable section is relatively short and has limited safe and legal access options due to the constraints of Interstate 84 and a non-Project irrigation diversion dam located immediately downstream of below the powerhouse. This reach is referred to herein as the Study Reach. While launching is straightforward from the recreation site put-in, taking out is problematic. The other limitation on whitewater boating in the Study Reach is sufficient flows. Especially during dry years (e.g., the last five, 20121 - 20165 the last 5 years), which are forecasted to become more the norm in the Project Area, when the Project is operating, there is rarely enough flow in the bypass reach to boat without suspending generation. These constraints are discussed in detail below under the Whitewater Boating Use and Demand Analysis.

There are no commercial whitewater outfitters operating on this reach. None are expected to operate in the future <u>becausedue to</u> the narrow river channel <u>is</u> not suitable for rafts, <u>theunpredictable</u> pattern of flows suitable for whitewater <u>boating is unpredictable</u>, and <u>there are</u> challenges with access.

Other recreation opportunities in the Project Area are limited by Interstate 84, the two active UPR lines, two pipelines, a fiber optic line, steep terrain, and limited safe and legal access. The potential for trails is limited due to safe access limitations and because users would have to

traverse either the channelized river (and cross under the existing I-84 bridge) or steep canyon walls on either USFS or private UPR lands.

Detailed documentation of recreational use of the Project Area is limited, which necessitated this study. Findings are summarized below under Results.

METHODS

This section provides a description of the proposed study methodologies, including data collection and analysis techniques, and a schedule including appropriate field season(s) and the duration.

The study methods involve the following four subtasks:

- Recreation Supply Analysis, which that inventories recreation facilities and use areas in the Project Area and their condition;
- Recreation Use and Demand Analysis, which that identifies existing recreational demand in the Project Area and estimates future demand for various activities of interest;
- Whitewater <u>B</u>boating <u>F</u>feasibility <u>S</u>study, <u>whichthat</u> evaluates whitewater boating use on the Weber River and possible enhancement measures for whitewater boating opportunities within the Project's bypassed reach;
- Recreation Needs Analysis, <u>whichthat</u> synthesizes, compiles and analyzes the results of
 all of the above analyses into one synthesis study report. This analysis identifies existing
 and future recreation needs over the potential term of the new license (30 to 50 years).

The study looked at Project-specific recreation supply and capacity, demand, and current and future needs in the context of the local supply and projected demand to determine if the existing Project recreation facilities are fulfilling their intended purpose and meeting recreation needs at the Project. The results of this analysis will be used in the development of recreation resource enhancement measures.

RESULTS

Recreation Supply Analysis

This section describes the existing recreation amenities at the Weber recreation site, their condition, and maintenance requirements.

Existing Recreation Amenities

The existing recreation amenities at the site are listed in Table 1. Appendix A includes all of the photos referenced below and a map indicating the point from which each was taken.

Table 1. Recreation amenities at the Weber Hydroelectric Project site. Photos referenced are found in Appendix A.						
Project No.	Recreation Amenity Name	Recreation Amenity Type	Amenity Status	Notes		
P-1744	Weber Rec Site Day Use Area	Picnic Area	Constructed	Parking for approximately 12 vehicles (photo 3), four tables (photos 7, 10, 11, and 12), four grills (photos 7, 10, 11, and 12), trash can (photo 4), and paved ADA-path leading to one table and grill (photo 7).		
P-1744	Weber Rec Site Day Use Area	Interpretive Display	Constructed	Information on Project management, rules, and fishing (photo 5).		
P-1744	Weber Rec Site Day Use Area	Fishing Platform	Constructed	Fishing platform at forebay, with <u>ADA</u> -handicapped access and one table (photos 1 and 2).		
P-1744	Weber Rec Site Day Use Area	Paved Path	Constructed	Paved path down the side of the grass area (photo 6 and 9).		
P-1744	Weber Rec Site Day Use Area	Informal Use Area	Constructed	Open grass area (photo 8 and 13).		
P-1744	Weber Rec Site Day Use Area	Active Recreation Area	Constructed	Sandbox play area (photo 16).		

Amenity Condition and Maintenance

The Weber recreation site day-use area is generally in good condition, but there are some items that need attention:

- The protective shields around the trees, to prevent damage by beavers, are often damaged or missing.
- The picnic tables are in good condition but the BBQ grills are missing from two of the posts. Maintenance personnel indicate that the grills are stolen from time to time, despite their being locked to the poles.
- The information display panel includes required FERC Part 8 regulations and fisheries information but is generally lacking in interpretive information about the site, although it does contain some information about Bonneville cutthroat trout and bluehead sucker, the two species of concern that are known to occur in the Project Area. It is in need of fresh paint.
- The fishing platform is in good condition with only the railing needing fresh paint.
- The paved trail is cracked and buckled due to tree roots and is overhung by branches in places.
- The chain link fence on the south side of the paved trail has numerous patches from visitors cutting holes in the fence, presumably for fishing access <u>downstream of below</u> the dam. Portions of the barbed wire along the top of this fence are damaged or missing.
- The grass is well cared for and in good condition.

• The sandbox area has become overgrown with vegetation and the fence surrounding the sandbox area is damaged.

The grass appeared to be well maintained and adequately cared for. The dumpster was never seen to be filled to capacity. The seasonal toilet appeared to receive sufficient maintenance to accommodate actual use levels throughout the study. Small pieces of scattered trash could be found in varying concentrations throughout the recreation site as well as along the river, both <a href="maintained-

During winter months, snow removal becomes an additional component of maintenance. This task is also conducted as needed.

In terms of Americans with Disabilities Act (ADA) compliance, the fishing platform is in compliance but the trail up to the picnic table nearest the parking lot is above the acceptable grade and is cracked and buckled by tree roots. The paved path on the south side of the recreation area is also not ADA compliant due to the aforementioned condition of the asphalt.

The recreation site is an out-of-the-way spot with ready freeway access. As a result, various illicit activities have been reported anecdotally, generally occurring at night. A Sheriff's Deputy attending to a minor incident at the recreation site during the study confirmed this speculation. PacifiCorp has considered installing a gate at the entrance to the diversion dam and recreation site that could be closed and locked at night.

Current maintenance conducted by Weber plant personnel at the recreation site entails grass mowing and edging, lawn watering, sprinkler maintenance and repair, tree branch removal, trash cleanup, and repair of vandalism. These tasks are conducted on an as-needed basis, as determined by the Weber personnel. A dumpster and seasonal toilet are also provided and maintained through contracts with outside companies.

Points of Public Access and Trails

The primary point of public access is through the recreation site picnic area along the paved trail. Beyond this paved trail, a primitive trail leads visitors further downstream (and outside the Project Boundary) where additional access is limited due to the positioning of the freeway. Several unsanctioned pull-off locations exist along the freeway that serve as access points as well.

Other Recreation Facilities in the Vicinity

The primary recreation facility in the vicinity is the State-managed rest stop located approximately 0.25 miles up the canyon. While this site is managed by the Utah Department of Transportation (UDOT), a privately contracted company maintains it. The area primarily provides a place for motorists to stop and rest, but people frequently use the area to picnic and fish. The USFS has no developed recreation sites in the vicinity.

The UDOT-managed rest stop absorbs a large amount of traffic. The impacts of this site and its close proximity to the Weber recreation site are multifaceted. The privately contracted company does a very good job of maintaining UDOT's rest stop facilities. When compared to the recreation site, fishing along this portion of the forebay is better, picnic tables are located closer to the river, signage is clearer, and the area is generally more accessible.

The area of primary concern as it relates to dispersed recreational activities is an area adjacent to Horseshoe Bend, on the old highway right-of-way, where people have been target shooting for some time. While this area falls outside of the Weber Project boundary (and is located on land owned partially by UPR and partially by the USFS), the Weber recreation site is the primary point of access. Photos of this location are in Appendix A (Photos 25 - 27).

Recreation Use and Demand Analysis

USFS representatives contacted for this study said-that they do not have any information regarding visitor uses in the Project vicinity. Due to the steepness of the canyon, hunting is the most common form of dispersed recreation outside of the Project Area.

The Utah 2014 State Comprehensive Outdoor Recreation Plan report shows current uses, visitor perceptions, and future needs for the Wasatch Front area. This information shows that about half of the Wasatch Front population regards outdoor recreation as extremely important. Just over half of these people travel over 25 miles for recreation opportunities. Some information from the report is relevant to use of the Weber recreation site:

- Hiking/backpacking ranks as the most common recreational activity of Wasatch Front residents, with camping second, and fishing third.
- Walking for pleasure or exercise is the most common outdoor activity in the Wasatch Front area, with playground activities third, wildlife/bird watching fourth, and picnicking fifth.
- City parks are the most important recreational facilities while "Natural Areas" are second. Most residents are very satisfied with existing city parks.
- Additional parks and hiking trails are the top recreational facility needs in the Wasatch Front area. Additional walking trails rank fifth, and playground equipment ranks ninth.

Visitor Survey

General recreation visitor surveys were conducted over the course of seven periods, once a month from March through September 2016. Surveyors were at the site approximately 12 hours each day and offered the survey to every visitor they encountered. In total 51 visitors were encountered and 47 of those completed the survey. Two of the individuals who declined to take the survey indicated that they had previously taken it and did not wish to take another. Visitors were either handed surveys to fill out on their own while at the site, assisted with filling out the survey while at the site, or given a survey to take home and return by mail, depending on their preference.

A copy of the survey and tabulated results are included in Appendix B. Many of the individual results are not discussed in the body of the report; while they may be of interest, they were not specifically relevant to the objectives outlined in the study plan, although this report does summarize common and/or specifically relevant findings.

Recreation Use Metrics

UDOT was contacted for visitor use data at the State rest stop and none was available.

Based on data collected over the course of this study, primarily during the visitor-use survey described in the preceding section, we estimate recreation use at the Weber recreation site in

Table 2. Although this use estimate is significantly different from the most recent annual vehicle count use estimate, the following paragraphs discuss the methodology behind the updated, better-quantified estimate.

Table 2. Recreation use metric estimates for the Weber recreation site.					
Estimated Recreation Visits Per Year	3,754				
Estimated Recreation Visitor-Days Per Year	605 – 1,248				
Site Occupancy (maximum observed during study):					
Parking (approximately 12 stalls)	50%				
Tables (five tables – four in grass area and one at the fishing platform)	20%				

As defined in the study plan, a recreation visit is "a visit by one person to a recreation area for any portion of a single day." We have no method of precisely calculating this value since there is no attendant at the entrance of the recreation area who could keep track of this kind of data. In order to estimate recreation visits we used data from our survey. Specifically, we used the average number of people who visited the site on the days we were surveying. Our survey took place on weekdays as well as on weekends. As expected, weekends had higher average recreation visits at 12 per day. Weekdays averaged 9.6 recreation visits per day. There are 52 weeks in a year with one additional day outside of those 52 weeks. Depending on the year, that day may be either a weekend or weekday. Since for 5 out of 7 years that extra day will be a weekday, we added one additional weekday worth of recreation visits to our yearly total presented in Table 2.

This estimate of recreation visits per year is substantially lower than the figure for 2014 cited above under Background Information. This results from several factors. First, the NPS vehicle occupancy figures of 2.4 and 2.7 for off-peak and peak seasons, respectively, are not reflective of observed use at the recreation site. Based on our visitor-use survey, actual peak-season occupancy was 1.4 per vehicle. This is consistent with the prevalence of solitary recreational pursuits such as fishing, walking, and target shooting that dominate use of this recreation site.

Second, the vehicle counter data used in the 2014 survey included vehicles that drove into the recreation site and immediately turned around. Again, this is a function of this recreation site's unique location, at the same highway exit as the State rest area. Third, the traffic counter data included PacifiCorp employees visiting the Project facilities, not the recreation area. Based on these considerations, we are confident that the estimates derived from the visitor-use survey are more reliable.

We also used survey data to estimate recreation visitor-days. The study plan defines a recreation visitor-day as "12 hours of use by any combination of users to a recreation area." In order to estimate this value we used the survey answers to question 6: "How long did you or are you going to be recreatingen at the Weber recreation site today?" Possible answers in the survey were "short trip (under 3 hours)," "about half the day," and "the majority of the day." There was no pattern evident in the answers to this question based on whether the survey was conducted on

a weekday or weekend, perhaps due to our small sample size (7 days of visitor surveys); therefore, we did not distinguish between weekends and weekdays in this calculation.

Seventy-nine percent of respondents selected the "short trip" option, with 15 percent selecting "about half the day" and 6 percent selecting "the majority of the day." Given the coarse nature of these categories, we present recreation visitor-days as a range. For the minimum estimate, we defined a short trip as 1 hour, half the day as 4 hours, and the majority of the day as 8 hours. For the maximum estimate, we defined a short trip to be 3 hours, half the day to be 6 hours, and the majority of the day to be 12 hours. Using the estimated recreation visits per year, the percentages of answers to question 6, and the two sets of values for question 6 answers, we estimated recreation visitor days as presented in Table 2.

Site occupancy is presented in Table 2 as maximum occupancy observed at recreation area facilities over the course of the surveys. Neither parking nor tables were ever observed to be approaching capacity with maximum parking occupancy at approximately 50 percent (based on a lot capacity of 12 vehicles) and maximum table occupancy at 20 percent (one of five occupied).

Trail Camera

A heat- and motion-triggered camera (Reconyx HC600) was installed in a position to view the primitive trail extending from just past the sandbox area toward the highway overpass on March 11, 2016. The camera operated continuously through September 13, 2016. There was a period from May 28, 2016 to June 28, 2016 when the camera became obscured by growing vegetation and no data was collected. After that, the camera was moved to a more elevated position where vegetation was no longer an issue. Unfortunately, based on the increasing trend of use from March through May and the generally declining trend of use from July through September, the missing period of June was likely the highest use period for the primitive trail. Thus the results may underestimate overall use, but the breakdown by type of recreation was not likely affected.

Individual trail users were only counted once per trip out and back on the trail, and each member of a party was counted individually. Occasionally users were seen going one direction on the trail and not the other, presumably due to use of a different route on the corresponding trip. These users were also counted once. Users were categorized into use types by their dress and any gear or equipment they carried. It was generally obvious what use-type to assign to a particular user, but in cases where it was unclear, walking was the default category. Table 3 summarizes the results of trail camera survey.

Table 3. Analysis of primitive trail users by use type. Based on data from remote camera.					
Use Type	Percentage	n			
March Individuals and Use Types (March 11-31)					
Fishing	44	31			
Walking	42	29			
Shooting	11	8			
Photography	1	1			
Prospecting	1	1			
Totals	100	70			

Use Type	Percentage	n
April Individuals and Use Types (A	April 1-31)	
Fishing	54	86
Walking	34	54
Shooting	11	17
Photography	1	2
Totals	100	159
May Individuals and Use Types (M	lay 1-28)	
Fishing	54	100
Walking	31	57
Shooting	9	16
Photography	3	6
Kayaking	3	5
Totals	100	184
June Individuals and Use Types (J	June 28-30)	
Fishing	79	26
Walking	12	4
Shooting	9	3
Totals	100	33
July Individuals and Use Types (Ju	uly 1-31)	
Fishing	73	200
Walking	12	53
Shooting	14	51
Photography	1	2
Totals	100	189
August Individuals and Use Types	· · ·	1
Fishing	68	124
Walking	20	37
Shooting	12	22
Totals	100	183
September Individuals and Use Ty	· · · · · · · · · · · · · · · · · · ·	T
Fishing	76	50
Walking	22	15
Shooting	2	1
Totals	100	66
Total Individuals and Use Types		T
Fishing	61	617

Table 3. Analysis of primitive trail users by use type. Based on data from remote camera.					
Use Type	Percentage	n			
Walking	25	249			
Shooting	12	118			
Photography	1	11			
Kayaking	<1%	5			
Prospecting	<1%	1			
Totals	100	1,012			

Clearly, fishing is the primary recreational use of the Project Area, based on use of the trail leaving the recreation site, with walking second. During June and July, fishing as a percentage gained relative to walking, perhaps as a result of summer heat. The third highest use, <u>target</u> shooting at the informal site adjacent to Horseshoe Bend on the old highway right-of-way, remained fairly consistent across the study period.

Whitewater Boating Feasibility Study

The relevant results of the associated *Whitewater Recreation Study Technical Report* are summarized below. The full report, with complete methods, results, and discussion, is attached as Appendix C. The objective of this study was to assess whitewater boating opportunities provided across a range of flow conditions based on the water available in the Study Reach downstream from the Weber diversion dam.

Whitewater Boating Hydrology Analysis

PacifiCorp maintains a non-consumptive water right of 365 cubic feet per second (cfs) from the Weber River for power generation. For purposes of this analysis, the average diversion for generation is assumed to be 300 cfs. During the most recent 10-year flow period (2005 – 2015), inflows of greater than 380 cfs to the Project (the total of approximate maximum generation flow and minimum instream flow), measured at the USGS Gateway gage, occurred approximately 31 percent of the time, or 113 days per year. These flows generally occurred from April through August, coinciding with irrigation season flows that are released upstream from Echo Reservoir. Inflows of greater than 700 cfs occurred approximately 11 percent of the time, or 40 days per year, almost exclusively in May and June. The Gateway gage is widely used by boaters and others to determine the flow in the Study Reach.

A minimum acceptable flow of 450 cfs through the Study Reach was calculated through the internet survey and focus group discussion (although a minority of focus group attendees reported boating the Horseshoe Bend section at lower flows), as indicated below <u>underin the</u> Whitewater Boating Use and Demand Analysis. The calculated minimum acceptable flow of 450 cfs in the Study Area is shown as a red line on Figure 2 for reference.

The Project is typically frequently offline during the winter months, in all but the wettest years, due to storage reservoirs and interference contracts on the Weber River upstream of the Project. During the non-operational periods all flows at Gateway gage pass over the Weber diversion dam and into the Study Reach. In 2015 and 2016 when the Project was offline, data from the

Gateway gage indicated that no flows over 450 cfs, and thus no boating opportunities in the Study Reach, occurred in 2015 and 2016 (Table 3-1 in Appendix C).

The Project operated for 176 days in 2015 and 217 days in 2016 through September 30, 2016 (end of the period covered by this report; as of November 9, 2016, the Project wais still operating at very low levels). During periods of Project operation, flows greater than 750 cfs are necessary at Gateway gage for a 450 cfs flow, and thus have a whitewater opportunity, in the Study Reach without reduction of generation. Mean daily flow at Gateway gage during Project operations was greater than 750 cfs on a single day in 2015 and 2 days in 2016 (note that Figure 2 below shows flow measurements in the Project study reach rather than values from the Gateway gage. In order to get Gateway gage values, 300 cfs must be added to the values in Figure 2). Days with acceptable flows for whitewater boating generally occurred in April and May.

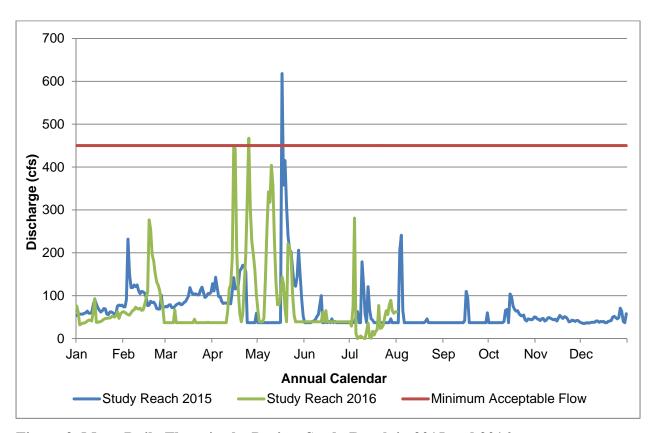


Figure 2. Mean Daily Flows in the Project Study Reach in 2015 and 2016

In short, flows sufficient to boat the Study Reach, from the accessible put-in at the recreation site to a safely accessible take-out downstream are rare would continue to be rare (based on the most recent flow data) without interrupting generation.

Whitewater Boating Use and Demand Analysis

Internet Survey and Focus Group

An Internet survey was launched on March 24, 2016, and closed on July 4, 2016. A total of 62 individuals responded to the survey with nine incomplete surveys removed from the overall

analysis due to incomplete survey responses. An additional eight surveys were included in the analysis of the background information but were excluded from the flow analysis due to a lack of responses for flow-related questions. A total of 45 responses were used in the flow analysis for this study. Survey respondents were encouraged to report the results of historic trips on the Study Reach as well as more recent trips. The earliest date for trips reported was November 26, 1976. The flows cited in trip reports ranged from 241 cfs to 4,300 cfs, as measured at the Gateway gGage.

PacifiCorp hosted a whitewater focus group for the Project on May 3, 2016, from 7:00-PM to 10:00 p.m.PM in Ogden, UtahT. A total of 30 invitations were delivered, and 15 individuals registered for the focus session, all of whom participated. Results of the Internet survey and focus group are summarized below.

Current Use

While this study identified 450 cfs as the minimum acceptable flow for the Study Reach as a whole, some use occurs at lower flows, mostly confined to the Horseshoe Bend rapid. This limited use is explained below under Flow Preferences.

Whitewater boating in the Study Reach typically occurs during the spring months, corresponding with the melting of the lower-elevation snowpack. In 2015, 22 reported trips from Internet survey participants occurred in the Study Reach from March through September with the majority of the trips occurring in May and June. In 2016, 11 trips were reported with the majority of trips occurring in April and a single trip listed for late June.

In general, whitewater boaters indicated they made fewer than five trips to the Study Reach during the previous 12 months (Figure 3-9 in Appendix C). In fact, 15 participants indicated they had not paddled the Study Reach in the previous 12 months, whereas 24 respondents indicated one to five trips in the previous 12 months. Two participants indicated making 6 to 10 trips or 11 to 20 trips, respectively, during the past 12 months. No participants reported making more than 20 trips during the past 12 months.

When asked the <u>total</u> number of trips they have made to the Study Reach for whitewater recreation over time, the largest number of Internet survey participants (n=17) indicated one to five trips total, followed by 12 participants indicating 11 – 20 total trips, and 11 participants indicating more than 20 total trips.

Weekends and weekdays after work hours (typically 5 p.m.PM) were preferred for trips to the study reach (Figure 3-12 in Appendix C).

Internet survey participants compared the study reach to local, state, and regional whitewater rivers using a five-point rating scale ranging from worse than average to among the very best. The whitewater resources used in the comparison included the Weber River play park, rivers within a one-1-hour drive, other rivers in Utah/Idaho/Wyoming, and other rivers in the United States. For each comparison, the majority of survey respondents rated the Project study reach worse than average relative to the other whitewater recreation resource comparisons (Figure 3-14 in Appendix C). Four survey respondents identified the study reach as among the very best within a one-1-hour drive. In general, the unfavorable rating of the Project study reach increased as the geographic radius of the comparison expanded (i.e., other rivers in Utah/Idaho/Wyoming and other rivers in the United States).

Challenge Level

The majority of Internet survey respondents rated the whitewater difficulty for this section of the Weber River as Class IV whitewater (Figure 3). Focus group participants provided more detailed ratings of the whitewater difficulty for the individual rapids across a range of flows. As expected, considerable discussion ensued among the participants regarding the difficulty of individual rapids at various flows. Individuals more familiar with the reach and with higher skill levels tended to rate the whitewater difficulty lower compared to individuals with less experience. In the end, the focus group participants agreed that the overall rating for the Study Reach is Class IV, reflecting the difficulty in Horseshoe Bend and Triple Drop rapids.

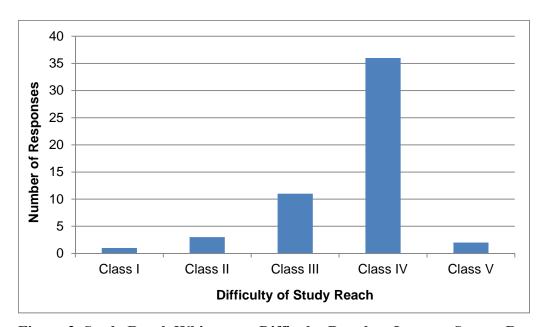


Figure 3. Study Reach Whitewater Difficulty Based on Internet Survey Responses

Flow Preferences

Focus group participants also provided information on flow preferences. Boaters indicated they rely on the Gateway gage located directly upstream of the Weber diversion dam for real-time flow information. The Gateway gage serves as a reference point since the boaters are not knowledgeable of PacifiCorp's diversion capacity. During the focus group discussion, boaters provided their flow preferences based on the Gateway gage flows. Those numbers have been adjusted (i.e., generation diversions subtracted as appropriate) to reflect flows in the Study Reach for comparison with flow recommendations provided by the Internet survey participants.

Section 4 of the Internet survey allowed participants to rate a range of flows from 200 to 1,000 cfs in the Study Reach. This comparative flow rating was used to develop flow preference curves (Figure 4). The minimum acceptable flow was just under 450 cfs. The optimum flow range was 600 to 1,000 cfs (Figure 4). Participants rated 900 cfs as the most acceptable flow between 200 and 1,000 cfs. Internet survey participants were largely in agreement that flows less than 400 cfs were unacceptable, but as flows increased above 400 cfs the acceptability ratings varied more broadly (Figure 3-16 in Appendix C).

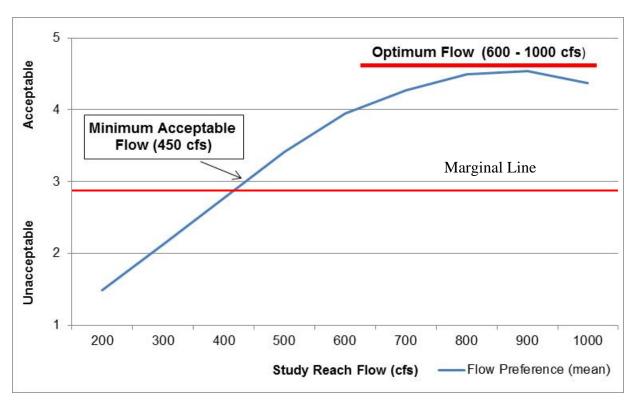


Figure 4. Flow Preference Curve Identifying Minimum Acceptable and Optimum Flow for Internet Survey Participants

Focus group participants commented that flow preferences have changed due to the changes in access to the Study Reach. Historically, when access was allowed from I-84 to the bottom of Horseshoe Bend, the minimum acceptable flow was as low as 140 cfs. Boaters would paddle the Horseshoe Bend rapid only, because 140 cfs was too low for Ledges 1, 2, and 3 at Triple Drop. Horseshoe Bend at 140 cfs offered a technical slalom boating opportunity. The current access restrictions require a higher minimum acceptable flow because more water is needed to navigate Triple Drop and the 1.2-mile Hell or Highwater section downstream. Focus group participants indicated the flow needed to navigate that section is 300 cfs, but the minimum acceptable flow is closer to 400 cfs for Ogden boaters and higher for boaters traveling longer distances.

Given the flow patterns summarized above under Whitewater Boating Hydrology Analysis, sufficient flows pose a substantial constraint to whitewater recreation in the Study Reach.

River Access

The majority of boaters put in a short distance downstream from the Weber diversion dam where the paved walking path terminates at the riverbank (Figure 3-18 in Appendix C). River access is not permitted <u>directlyimmediately</u> downstream of the dam for safety and liability reasons. Boaters are able to launch on a gravel bar approximately 200 meters downstream from the dam (Photo 3-11 in Appendix C). PacifiCorp employees have observed boaters launching in the Project forebay. One focus group participant said he had paddled over the dam in the past. The

dam is not suitable for safe navigation (Photo 3-12 in Appendix C) and paddling over it is discouraged by PacifiCorp.

After boating the Horseshoe, aka Scrambled Eggs, section of the bypassed reach using the recreation site put-in, boaters must either carry their boats back upstream along the old highway bed and back to the put-in, or continue downstream and portage the non-Project diversion located immediately downstream of below the powerhouse. This diversion is owned by the Davis-Weber Irrigation Company, and it commonly takes most or all of the flow in the Weber River at that point, limiting options to continue downstream.

The boatable reach of the river is further constrained by being located between the two lanes of I-84, and the only downstream access route is the road to the Davis-Weber irrigation diversion dam, which is gated and locked downstream of the potential portage area.

The only other access to the boatable reach is via the old highway bed, and the access point has been gated and locked by UDOT to prevent recreationists from using a freeway pullout that is considered unsafe due to the lack of acceleration and deceleration lanes. Due to geomorphology constraints, there is no room for acceleration or deceleration lanes in the Project Area.

The majority of boaters take out on South Weber Drive, also known as the Mouth of the Canyon (Figure 3-19 in Appendix C). During the focus group, participants indicated this is the default location currently, but it's not preferred because it requires paddling the 1.2-mile Class II-III section, Hell or High Water, below Triple Drop, portaging around the Davis-Weber Irrigation Company Dam and paddling another 0.75 mile Class II section that may be severely dewatered by irrigation flow diversions.

In summary, safe and legal access to the Study Reach is difficult and limits use of the Study Reach by whitewater boaters.

Whitewater Boating Needs Analysis

Project operations, particularly in the months of April and May, cause a decrease in the number of whitewater boating opportunities. The Project diverts 300 cfs to the Weber powerhouse when instream flows at Gateway gage range from 450 to 750 cfs resulting in flows less than the minimum acceptable in the Study Reach. Mean daily flows between 450 and 750 cfs at Gateway gage occurred 13 and 26 days respectively in 2015 and 2016, resulting in a total reduction of 39 days of boatable flows. Flows greater than 750 cfs at Gateway gage result in sufficient discharge in the Study Reach for whitewater boating. Mean daily flows at Gateway gage exceeded 750 cfs 1 day in 2015 and 2 days in 2016.

Potential access improvements could be implemented at the Project Area for river recreation users. The historic direct access used by boaters to Horseshoe Bend from I-84 is unlikely to be restored. Vehicles travel in the west bound lane of I-84 at speeds in excess of 75 miles per hour. Direct access to Horseshoe Bend would require construction of an off and on-ramp to I-84. The site is physically constrained, eliminating the viability of this option. The current put-in location at the Weber recreation site is suitable for whitewater boaters to park vehicles and access the river. The current take-out location is not suitable. A more desirable take-out location upstream of the Davis-Weber Irrigation Company Dam is needed so boaters do not need to portage the diversion dam and paddle undesirable low flow conditions to the take-out. A potential parking area is located on river left adjacent to the Davis-Weber Irrigation Company Dam. Boaters can

exit the river upstream of the Davis-Weber Irrigation Company Dam and walk a short distance (approximately 200 yards) to their vehicle.

Typically, a whitewater boating needs analysis would include an assessment of the recreation opportunities provided by an unregulated river, and then compare those to what might be available in a post-Project regulated reach. As the Study Reach is heavily regulated, both by upstream diversions and Project operations, and access to the Study Reach is compromised by athe highway that was constructed after the Project was installed, separating impacts to recreation (access, flows, Project operations) to the extent necessary to do a complete needs analysis is not practical. Additionally, due to the run-of-river design and lack of water storage at the Weber Hydroelectric Project, the Project cannot provide flows sufficient to augment whitewater boating opportunities without significantly compromising generation. However, the needs analysis concluded the following:

- Flow-dependent recreation opportunities occur infrequently on the Weber River (which is regulated by upstream water storage and diversion projects beyond PacifiCorp's control), including the Study Reach, during the spring season.
- These opportunities are hampered by a lack of safe and legal access and egress.
- These limited recreation opportunities are affected by Project operations.
- Opportunities exist to increase the annual frequency of whitewater boating opportunities in the Study Reach when flows at Gateway gage are between 450 and 750 cfs.
- Notification of planned Project maintenance resulting in increased flow in the Study Reach could be beneficial to the boating (and fishing) community.
- PacifiCorp could participate in agreements to improve access at the Davis-Weber Irrigation Company Diversion directly downstream of the Weber powerhouse.

Recreation Needs Analysis

Current Needs

Managing the Weber recreation site presents a trade-off between making improvements and retaining the less-developed character of the site. Survey respondents indicate that they recognize this trade-off as well. If the area is significantly upgraded, it is likely that use will increase, which is something visitors commonly want to avoid. It is important to ensure that the facilities at the recreation site are sufficient to provide for visitors' needs but also to preserve the lower use levels and sense of quiet that brings people to the site in the first place.

Survey and trail camera results indicate that fishing, the most common form of recreation at the recreation site, is what visitors are most concerned about and where additional investment may be most warranted. Fishermen most strongly suggest that they would like to see improved inriver fish habitat. At a Project site visit to kick_-off this study, the UDWR representative said that there might be interest in making additional investments in the area. This partnership should be explored, and any reasonable improvements to habitat that can be made in the Project reach should be assessed.

For example, survey results indicate that fishermen are in favor of improving the trail beneath the freeway. Respondents noted that rattlesnakes are commonly found beneath the freeway, and one

photo from the trail camera shows a man carrying a large dead snake on the end of his trekking pole. This trail could be improved and made safer by moving some large boulders then filling in the holes with an aggregate to create a trail. Note however that the trail exists in and crosses UDOT's I-84 freeway bridge right-of-way (ROW). UDOT engineers may or may not allow any alteration to the bridge footings that the primitive user-created trail traverses.

Fishermen also indicate that they would like other improved access to the river. The current primary access point located at the west end of the picnic site could be improved through the use of boulders to create an easy-to-navigate, natural looking staircase down to the river.

Improved waste collection is an area for improvement as reflected by the survey group. Small pieces of trash can be found throughout the recreation site, but litter is particularly abundant along river shores and at the shooting site. Policing this issue would be challenging in terms of resources, but there may be a good solution through a combination of increased signing and an additional trash can located on the far end of the picnic site.

Walkers, the second largest user group according to the trail camera data, would benefit from these trail improvements.

Target shooters are a relatively well-represented group in trail camera photos. While target shooting is not provided or managed on PacifiCorp Project lands, the recreation site does currently provide some of the access to an area commonly used for target shooting (above Horseshoe Bend, on the old highway ROW). Survey respondents commonly identified the shooting area as a place in need of improvement and management. PacifiCorp has no mandate or authority to control the shooting area (which is located on land owned partially by UPR and partially by the USFS), but collaboration with local law enforcement might improve the situation.

One surprising result of the survey and trail camera data was the relatively small number of kayakers. Only five individuals from this user group were captured on the trail camera (less than 1 percent of the total recorded, although the camera was offline for a month during the highest period of use from May 29 – June 28, 2016), and none were encountered on survey dates. However, the camera data should not be taken to mean that only five kayakers used the Study Reach during the study period since many kayakers do not use the primitive trail but instead put in just downstream of below the recreation site, or from a pullout located between the two freeway lanes in the immediate vicinity of the Horseshoe Bend; either location would not be picked up by the trail camera. Further, the whitewater user survey data indicated that 11 boaters utilized the area in 2016 (the year the camera was recording). At any rate, the preceding discussion under Whitewater Boating Needs Assessment identifies two improvements that would enhance this form of recreation in the Project Area – notification of when Project maintenance or other conditions were anticipated that would result in boatable flows in the Study Reach, and potential arrangements to improve take-out access at the Davis-Weber Irrigation Company Diversion downstream from the Weber powerhouse. Most other improvements suggested by survey respondents would also benefit boaters.

Other survey results revealed important information about how this site is used. This information should be considered when contemplating future management of the Weber recreation site:

• The site is used primarily by people who live nearby. Eighty-six percent of surveyed site users indicated that they reside in Weber, Davis, and Morgan counties.

- Ninety-seven percent of surveyed site users indicated that they would be using the site less than half the day.
- Seventy-six percent of surveyed site users indicated that they had used the site more than 10 times. This represents a substantial number of repeat visits.
- The vast majority (74 percent) of surveyed site users indicated that they had used the primitive trail. This highlights the importance of that trail on visitor's use of the site.
- The primitive trail option for "Needs Improvement" was selected twice as often as the next highest selection, restrooms (34 vs. 16 percent).

In terms of potential improvements to the recreation site itself, survey respondents and the recreation specialists carrying out the study made these suggestions:

- Improvingements to the user-created trail (if allowed by UDOT) under the freeway could facilitate access for most recreational users, although this area is outside the Project Boundary.
- Replacement of the chain link fence restricting access <u>downstream ofbelow</u> the diversion dam was frequently mentioned, although the fence is required to provide operational safety to recreational river users immediately downstream of the Project spill gates. There are multiple locations where the fence has been patched after being cut by fishermen trying to gain access closer to the dam. Signage indicating the distance to downstream river access could be added to reduce fence cutting.
- The USFS representative expressed interest in getting involved and possibly providing resources and expertise to improve the signage at the recreation site. Providing relevant information would improve visitors' recreation experience. The relationship with the USFS would allow for improved interpretive signing, including additional topics related to fish and wildlife, as well as the mandated FERC Part 8 form which is currently posted.
- Improvements to the recreation site turn-off from the freeway off-ramp and the road from the turn-off to the picnic area were also suggested. The road is potholed and lacks any signing that would welcome a visitor. Collaboration with the USFS could possibly result in a good sign for this location.
- The parking area itself lacks painted lines. Visitors expressed an interest in delineated parking stalls. The provision of an ADA parking stall should go along with this.
- Survey results suggest that a year-round toilet be part of the plan to address current needs and increased use in the future. While half of the survey group rated the current restroom as "Adequate," several of them made comments about improving to a permanent toilet, including the husband of one woman using a wheelchair.
- Removal of the fence around the sandy area at the west end of the picnic area was suggested, as was improving river access at this location.
- The problem with the fishing platform is not its condition but its location. The forebay in front of it is shallow and users cannot access areas with the best fishing, although this is a common problem with providing fishing opportunities in areas that are easily accessible

from the parking area for all ability users. The fishing platform itself is in good condition, but the handrail could use new paint.

- Recreation site trees are being protected from beavers with sheet metal sleeves, secured with electrical tape. A visitor is seen in one picture from the trail camera carrying one of these metal sleeves that had come free, and it poses a possible safety hazard. A more aesthetically looking, safer, and more secure alternative could be used.
- Improved access to river flow information would help both boaters and fishing enthusiasts plan trips to the bypassed reach.
- Comments from American Whitewater on the preliminary draft report suggested the need for a discussion exploring the potential for whitewater flows through suspension of generation.

Future Needs

In the short to medium term, i.e., the next 10 to 20 years, visitor expectations regarding the types of recreational experiences available in the Project Area are not expected to change substantially. The site characteristics that currently limit recreation options, discussed in the preceding sections, are generally not subject to change. Day use by solitary, local fishermen, walkers, and target shooters will remain the dominant activity, with whitewater boaters taking advantage of the Study Reach when flow conditions allow. State of Utah population estimates project statewide population growth of 44 percent over the next 20 years. Use of the Weber recreation site could be expected to increase proportionally. Under this projected scenario, the improvements suggested above – primarily repair and replacement of existing facilities – are likely to be sufficient to meet anticipated needs.

As <u>previously</u> noted <u>above underin the</u> Background Information <u>section</u>, the recreation site is sometimes used for illicit activities at night because it is easily accessible and outside the public eye. PacifiCorp has considered gating the entrance and locking it at night. This may become a more pressing need as the area population grows. However, the trail camera study indicated that fishermen enter and depart before sunrise and after sunset, so nighttime closure would adversely affect that form of recreation.

Beyond the 20-year horizon through the term of the license, it is difficult to project how recreational demands on the Project Area and the options available to address them might change. The site's physical characteristics will continue to impose hard limits on recreational potential, but new forms of recreation and associated technologies will undoubtedly emerge. Witness the rapid growth of mountain biking over the past decade, or the emerging popularity of flying drones. Population growth will likely continue to accelerate, putting more pressure on all recreation venues.

In the face of this uncertainty, the most pressing need may be for PacifiCorp to maintain effective working relationships with its partners in managing Project Area land and resources, the USFS, UDWR, and UDOT. Through collaboration, these entities can ensure that the Project and surrounding land and infrastructure accommodate and support changing trends in recreation as effectively as possible.

DRAFT Recreation Study Technical Report PacifiCorp's Weber Hydroelectric Project Relicensing FERC Project No. 1744

This page intentionally left blank

APPENDIX A – SITE PHOTOS





Recreation Supply Analysis Photo Locations

Photo Locations - Arrow Indicates Direction





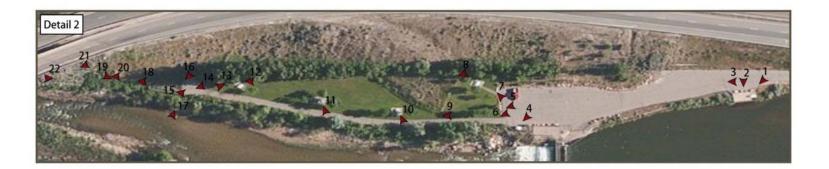




Photo Point 1



Photo Point 2



Photo Point 3



Photo Point 4



Photo Point 5



Photo Point 6



Photo Point 7



Photo Point 8



Photo Point 9



Photo Point 10



Photo Point 11



Photo Point 12



Photo Point 13



Photo Point 14



Photo Point 15



Photo Point 16



Photo Point 17

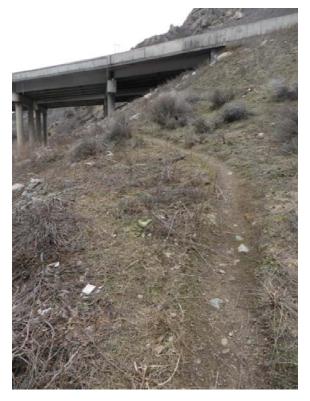


Photo Point 18



Photo Point 19



Photo Point 20



Photo Point 21



Photo Point 22



Photo Point 23



Photo Point 24



Photo Point 25



Photo Point 26



Photo Point 27

This page intentionally left blank

APPENDIX B – VISITOR SURVEY QUESTIONNAIRE AND RESULTS

BLANK VISITOR USE SURVEY

Weber General Recreation Visitor Use Survey

PacifiCorp Weber River Hydroelectric Project – Weber Canyon, Weber, Morgan, and Davis Counties, Utah

Introduction

PacifiCorp owns and operates the Weber Hydroelectric Project on the Weber River in Weber, Morgan, and Davis counties in Utah. This Project is operated under a license granted by the Federal Energy Regulatory Commission (FERC Project No. 1744). That license is nearing the end of its term and PacifiCorp has begun the process of renewing the Project's license. PacifiCorp would like to take this opportunity to evaluate the recreation uses associated with the Project.

PacifiCorp is requesting information from you to help in the evaluation of recreation opportunities associated with the Weber Hydroelectric Project, and on lands surrounding the Project. Please note that the Weber Recreation Site is unaffiliated with the nearby UDOT Rest Area; the recreation site is related solely to the Weber Hydroelectric Project. The information you provide will be used to describe the current recreation uses of the Project and determine the future recreation needs of the Project Area. Your participation in this survey is voluntary and the information you provide is strictly confidential. Your information will only be used for the purposes described here.

Thank you for your time and consideration.

To return survey by mail, please send to:

Cirrus Ecological Solutions 965 S 100 W #200 Logan, UT 84321

1.	Would you be willing to take a few approximately 10 minutes to complete this survey? ☐ Yes ☐ No
	If no:
	Primary activity: Reason for refusal:
	Reason for refusal.
2.	Is recreation your primary purpose for visiting this site today? ☐ Yes ☐ No
	If yes, what is your primary form of recreation at this site today?
	If no, what is the purpose of your visit here today?
	☐ Working or commuting to work
	☐ Stopping to use the restroom
	☐ Curious to see where this road goes
	☐ Other:
3.	Including yourself, how many people are in your group today?
4.	How many vehicles did your group use to visit the recreation site today?
5.	Does anyone in your group have disabilities? ☐ Yes ☐ No
	If yes, are there sufficiently accessible facilities at this site for your activity? ☐ Yes ☐ No
	If no, please explain:
	ii no, piease explain.
6.	How long did you or are you going to be recreating at the Weber recreation site today? ☐ Short trip (under three hours) ☐ About half the day ☐ The majority of the day
7.	On average, how many times per year do you use this recreation site?
8.	Approximately how many times have you used this recreation site in total? 1 2-5 6-10 10-20 20+

DRAFT Recreation Study Technical Report PacifiCorp's Weber Hydroelectric Project Relicensing FERC Project No. 1744

9.	How did you get information about or hear about this recreation site the first time you visited it?
	☐ Stumbled upon it
	☐ Word of mouth
	☐ Gear/tackle shop
	☐ Website If so, which website:
	□ Other:

10. Please indicate: During which seasons have you participated in various activities at the recreation site?

Activity Type:	Never	Spring	Summer	Fall	Winter
Walking/Hiking					
Fishing from bank/wading above the dam					
Fishing from the platform above the dam					
Fishing from a float tube or similar craft above the dam					
Fishing from bank/wading downstream from the dam					
Whitewater boating					
Road cycling					
Driving for pleasure					
Viewing/photographing natural features					
Picnicking					
Relaxing/hanging out					
Nature study					
Escaping city/getting outdoors					
Swimming					
Bird watching					
Other:					

11. Did you use the primitive trail passing under the freeway from the recreation site to access the
river during your visit?
□ Yes
□ No
If yes, was the trail sufficient to meet your needs?
□ Yes
□ No
12. If you are using the river today, did you check the current river flow before your visit?
□ Yes
□ No
If yes, where did you get your information regarding flows (USGS 'Gateway' gage is the one
located approximately one mile upstream of the hydroelectric Project)?
13. Please indicate: How important were the following factors in selecting this site for recreation
today?

Factor:	Extremely Important	Very Important	Somewhat Important	Slightly Important	Not Important
Proximity to home					
Variety of recreation opportunities					
No access fee required					
Lack of crowding					
Natural setting					
Access to river					
Access to whitewater boating areas					
Onsite restroom facilities					
Availability of picnic sites					
Pets permitted					
Clean/well maintained facilities					
Feeling of safety					
Handicapped access					
Other:					

14. If you are participating in whitewater boating during your visit, please indicate: Where did you put in and take out?

Location	Put In Location	Take Out Location
Weber Recreation Site (here)		
Pulled over on side of I-84 near the Horseshoe Bend		
Davis-Weber Irrigation Company dam (2 miles downstream from here)		
Other:		

15. Please indicate: What is your opinion of the condition of the facilities at the recreation site?

	Condition						
Site Feature	Excellent	Adequate	Needs improvement	Not applicable	Suggestions for improvement		
Parking facilities							
Picnic facilities							
Restrooms							
Fishing platform							
Primitive trail passing under the freeway from the recreation site							
Paved walkway running downriver from recreation site							
Other							
Other							

DRAFT Recreation Study Technical Report PacifiCorp's Weber Hydroelectric Project Relicensing FERC Project No. 1744

16. What are the most important actions that could be taken to improve recreation at this site? ☐ Additional picnic facilities ☐ Improved trail passing under the freeway from the recreation site ☐ Other improved fishing access to river ☐ Improved boater access to river ☐ Improve in-river fish habitat ☐ Improved waste collection ☐ Improved access to information about river flows ☐ Other (Please explain):
17. Please provide any additional comments about recreation at this site you think are important:
18. What is your age?
19. What is your gender? ☐ Male ☐ Female ☐ Other ☐ Prefer not to respond
20. Which racial group do you most closely identify with? ☐ American Indian/Alaska Native ☐ Asian ☐ Black/African American ☐ Native Hawaiian or other Pacific Islander ☐ White/Caucasian ☐ Other: ☐ Prefer not to respond
21. In what zip code do you reside?
Date:
Time:
Flow Rate:

SURVEY RESPONSE ANALYSIS

Visitor Demographics:

Survey Question: What is your age?					
Age Percent n					
<25	24	11			
26-40	24	11			
41-60	35	16			
>61	17	8			
Total	100	46			

Survey Question: What is your gender?					
Gender Percent n					
Male	96	45			
Female	4	2			
Other	0	0			
Total	100	47			

Survey Question: Which racial group do you most closely identify with?				
Racial Group	Percent	n		
American Indian/Alaska Native				
Asian				
Black/African American				
Native Hawaiian or other Pacific Islander				
White/Caucasian	85	40		
Latino	11	5		
Other	2	1		
Prefer not to respond	2	1		
Total	100	47		

Survey Question: In what zip code do you reside?						
Zip code	Zip code Location/ Distance from Rec site Percenta					
84040	Layton, UT/7.4 mi.	19%	9			
84403	Ogden, UT/22 mi.	11%	5			
84050	Morgan, UT/19 mi.	11%	5			
84405	Ogden, UT/9.2 mi.	6%	3			
84414	Ogden, UT/24 mi.	4%	2			
84015	Clearfield, UT/15 mi.	4%	2			
84041	Layton, UT/12 mi.	4%	2			
84401	Ogden, UT/15 mi.	4%	2			
84010	Bountiful, UT/25 mi.	4%	2			
84075	Syracuse, UT/19 mi.	4%	2			
84070	Sandy, UT/44 mi.	2%	1			
84087	Woods Cross, UT/26 mi.	2%	1			
84046	Manila, UT/167 mi.	2%	1			
84101	Salt Lake City, UT/31 mi.	2%	1			
83686	Nampa, ID/331 mi.	2%	1			
85383	Peoria, AZ/667 mi.	2%	1			
84092	Sandy, UT/51 mi.	2%	1			
68930	Montrose, CO/382 mi.	2%	1			
84301	Bear River City, UT/46 mi.	2%	1			
	Total	100%	47			

Visitor Characteristics:

Survey Question: Including yourself, how many people are in your group today?			
Number in Group Percent n			
1	60%	28	
2	30%	14	
3 10% 5		5	
Total 100% 42			

Survey Question: What is your primary form of recreation at this site today?				
Use Type	Percentage n			
Fishing	Fishing 75% 35			
Walking	ng 17% 8			
Photography	2% 1			
Picnicking 2% 1		1		
Cycling 2% 1				
Driving 2% 1				
Total 100% 47				

Survey Question: Does anyone in your group have disabilities?			
	Percentage	n	
Yes	4%	2	
No	96%	45	
Total	100% 47		
If yes, are there sufficiently accessible facilities at this site for your activity?			
	Percentage n		
Yes	50% 1		
No	50% 1		
Total	100% 2		
Comments	Improve bathroom		

Survey Question: How long did you or are you going to be recreating at the Weber recreation site today?				
Duration Percentage n				
Short Trip (<3 hours) 79% 37				
About half the day 15% 7				
The majority of the day 6% 3				
Total 100% 47				

Survey Question: On average, how many times per year do you use this recreation site?				
Number of Visits Percentage n				
<5	<5 32% 15			
6-20 23%		11		
20 + 45% 21		21		
Total 100% 47				

Survey Question: Approximately how many times have you used this recreation site in total?			
Number of Visits Average n			
1	1 9% 4		
2-5 11% 5			
6-10 4% 2		2	
10-20 6% 3			
20 + 70% 33			
Total 100% 47			

Survey Question: How did you get information about or hear about this recreation site the first ime you visited it?		
Method	Percentage	n
Stumbled upon it	52%	25
Word of mouth	46%	21
Gear/tackle shop		
Website	2%	1
Other		
Total	100%	47

Participation in Activities in the Study Area:

Survey Question: Please indicate: During which seasons have you participated in various activities at the recreation site?

activities at the recreation site?	Sanar				
	Season			1	
Activity Type	Never	Spring	Sumer	Fall	Winter
		Partici	pation Perce	entage	
Walking/Hiking	53%	40%	43%	36%	13%
Fishing from bank/ wading above dam	50%	48%	43%	43%	22%
Fishing from the platform above the dam	83%	17%	15%	13%	9%
Fishing from a float tube or similar craft above the dam	83%	4%	9%	4%	2%
Fishing from the bank/ wading downstream of the dam	15%	76%	76%	68%	45%
Whitewater boating	89%	4%	9%	4%	2%
Road cycling	94%	2%	4%	2%	0%
Driving for pleasure	63%	35%	37%	35%	30%
Viewing/photographing natural features	55%	40%	40%	38%	32%
Picnicking	60%	26%	40%	30%	2%
Relaxing/hanging out	47%	48%	51%	43%	30%
Nature Study	81%	17%	19%	17%	13%
Escaping city/ getting outdoors	40%	57%	57%	55%	40%
Swimming	91%	0%	9%	2%	0%
Bird watching	72%	26%	28%	19%	17%
Other:					

Survey Question: Did you use the primitive trail passing under the freeway from the recreation site to access the river during your visit?

Response Percentage		n	
Yes	74%	35	
No	26%	12	
Total	Total 100		
If yes, was the trail sufficient to	If yes, was the trail sufficient to meet your needs?		
Yes 64% 30			
No 11%		5	
N/A 25%		12	
Total	100%	47	

Survey Question: If you are using the river today, did you check the current river flow before your visit?

Response	Percentage	n	
Yes	15%	7	
No 85%		40	
Total 100%		47	

If yes, where did you get your information regarding flows (USGS 'Gateway' gage is the one located approximately one mile upstream of the hydroelectric Project))?

Responses:

"Utah angler's report," "didn't find anything," "Utah stream flow," "Fishing report," "USGS Gateway gage."

Importance of Factors:

Survey Question: Please indicate: How important were the following factors in selecting this site for recreation?

Response	Average rating of importance from 1 (low) to 5 (high)	
Proximity to home	4.15	
Variety of recreation opportunities	3.06	
No access fee required	4.45	
Lack of crowding	4.21	
Natural setting	4.08	
Access to river	4.34	
Access to whitewater boating areas	1.65	
Onsite restroom facilities	2.93	
Availability of picnic sites	2.6	
Pets permitted	2.39	
Clean/well maintained facilities	3.56	
Feeling of safety	3.91	
Handicapped access	2.77	
Other	"Snow plowed roads," "Good fishing."	

Survey Question: If you are participating in whitewater boating during your visit, please indicate: Where did you put in and take out?

	Percentage	n
Location	Put In Location	Take Out Location
Weber Recreation Site (here)		
Pulled over on side of I-84 near the Horseshoe Bend		
Davis-Weber Irrigation Company dam (2 miles downstream from here)		
Other:		
N/A	100%	47
Total	100%	47

Opinion of Facilities:

Survey Question: Please indicate: What is your opinion of the condition of the facilities at the recreation site?

Site Feature	Excellent	Adequate	Needs Improvement	N/A
Parking Facilities	47%	45%	6%	2%
Picnic Facilities	47%	38%	13%	2%
Restrooms	26%	49%	16%	9%
Fishing platform	28%	21%	6%	45%
Primitive trail passing under the freeway from the recreation site	15%	34%	34%	17%
Other				

Survey Question: What are the most important actions that could be taken to improve recreation at this site?

Option	Percentage	n
Additional picnic facilities	15%	7
Improved trail passing under freeway from the recreation site	36%	17
Other improved fishing access to river	38%	18
Improved boater access to river	6%	3
Improve in-river fish habitat	53%	25
Improve waste collection	36%	17
Improve access to information about river flows	30%	14
Other		

Additional Information:

Leave as is.

Survey Question: Please provide any additional comments about recreation at this site you think are important:

are important:
Responses
Clean up old water line on old road.
Leave as is.

Survey Question: Please provide any additional comments about recreation at this site you think are important:

Responses

Improve the walking path under the freeway.

Create trail from S. Weber to Mountain Green.

More picnic tables, improve paved and primitive trail, provide access at dam.

Doing a good job.

Remove most fences.

More tables, access to dam.

Fix potholes.

Remove barbed wire.

Provide access at dam, remove trash at shooting range.

Artificial lures from dam to mouth of canyon, slot limits similar to Provo and Green Rivers.

Pave trail under highway, provide access to other side of river, encourage cleaning shells at shooting area.

Dredge river above dam, add rocks/gravel for better fishing off platform, plant more brown trout.

Clean or eliminate shooting area.

Preserve access.

Keep fence. Create access to other side of river.

Clean trash at shooting area, restrict access at dam.

Fishing platform in bad location. Maybe improve fishing habitat near the platform.

Add shooting info and designated area, lower flows below dam to improve fishing.

Keep as is.

More studies about the relationship between fish and flow rates.

Paint parking lines, improve pavement at turn-in, contain trash at shooting site, improve primitive trail, install parking at horseshoe bend, improve restroom.

Improve primitive trail, remove excessive vegetation in river, improve maintenance at forebay, increase water release.

Designated shooting area or maybe don't allow shooting.

More restrooms.

Permanent restroom.

Improve primitive trail, don't over-improve site, keep from getting crowded.

Less rocks to crawl over on primitive trail.

Please don't change anything.

Permanent bathroom, remove weeds from water, better trail with more rocks.

APPENDIX C – WHITEWATER TECHNICAL REPORT

Appendix C - Weber River Hydroelectric Project FERC No. 1744

Whitewater Recreation Study Technical Report

Prepared for:

PacifiCorp



Salt Lake City, UT

Prepared by:

ERM-West, Inc.



Bigfork, Montana August 2016 (This Page Intentionally Blank)

Contents

1.	INTRODUCTION
1.1.	Study Objectives
1.2.	Nexus to Project
1.3.	Project Area
2.	METHODS
2.1.	Whitewater Boating Hydrology Analysis
2.2.	Whitewater Boating Needs Analysis
2.2.1.	Level 1 Desktop Effort
2.2.2.	Level 2 Field Reconnaissance
2.3.	Whitewater Boating Use and Demand Analysis
2.3.1.	Level 3 Survey Questionnaire
2.3.2.	Level 3 Focus Group
2.3.3.	Flow Preferences 5
3.	RESULTS 665
3.1.	Whitewater Boating Hydrology Analysis
3.2.	Whitewater Boating Use, Demand, and Needs Analysis
3.2.1.	Internet Survey and Focus Group Participation
3.2.2.	Whitewater Rapids
3.2.3.	Whitewater Use Patterns <u>161617</u>
3.2.4.	Whitewater Flow Preferences
3.2.5.	River Recreation Access
4.	DISCUSSION <u>3131</u> 32
5	REFERENCES 34

Appendices		
Appendix A	Whitewater Recreation and Access Internet Survey	
Appendix B	Focus Group Email Invitation	
Appendix C	Focus Group Discussion Notes	
Appendix D	Focus Group Attendance	
Appendix E	Focus Group Announcement	
Appendix F	Focus Group Background Survey	
List of Table	s	
Table 2-1: Min	nimum instream flow requirements based on runoff forecast	3
	mber of Days with Boating Opportunities 2015-2016 in Project Study Reach	
Table 3-2: Wh	nitewater Rapids in the Study Reach	12 13
	an Value for Minimum Acceptable and Optimum Flow Written in for the Interpants	
List of Figure	es	
Figure 1-1: W	eber River Hydroelectric Project Recreation Study Area	2
Figure 3-1: M	ean Daily Flows at the Gateway gage No. 10136500	<u>667</u>
Figure 3-2: M	ean Daily Flows in the Project Study Reach in 2015 and 2016	. <u>7</u> 78
Figure 3-3: Ag	ge Distribution for Focus Group and Internet Survey Participants	9
Figure 3-4: Ge	ender of Focus Group and Internet Survey Participants	9 9 10
Figure 3-5: W	hitewater Skill Level for Focus Group and Internet Survey Participants	10
-	pe of Craft used by Focus Group and Internet Survey Participants in the Study	
Figure 3-7: Lo	ocation of Whitewater Rapids within the Project Study Reach	11 12
Figure 3-8: St	udy Reach Whitewater Difficulty Based on Internet Survey Responses 16-	16 17
Figure 3-9: Nu	umber of Trips to the Study Reach by Internet Survey Participants	17 18
	Amount of Time Spent Paddling during a Typical Trip through the Study Reach	
Figure 3-11: N	Number of Laps during the Reported Trip to the Study Reach	18 19
Figure 3-12: T	Ciming of a Typical Whitewater Recreation Trip to the Study Reach	19 20
Figure 3-13: In	nternet Survey Acceptability Rating for Whitewater Features for the Study Rea	ch

Figure 3-14: Internet Survey Comparison of the Study Reach with Local, Regional, and Na Opportunities	
Figure 3-15: Flow Preference Curve Identifying Minimum Acceptable and Optimum Flow Internet Survey Participants	
Figure 3-16: Box and Whisker Plot of Flow Comparison Ratings from Internet Survey Participants	3 <u>23</u> 24
Figure 3-17: Parking Location Frequency for Internet Survey Respondents 2	<u>62627</u>
Figure 3-18: Put-in Location for Internet Survey Respondents	<u>929</u> 30
Figure 3-19: Take-out Location for Internet Survey Respondents 2	<u>92930</u>
List of Photos	
Photo 3-1: Upper Section on Horseshoe Bend Rapid at ~40 cfs May 04, 2016 1	<u>313</u> 14
Photo 3-2: "The Bend" in Horseshoe Bend at ~2500 cfs	<u>313</u> 14
Photo 3-3: Lower Section on Horseshoe Bend Rapid at ~40 cfs May 03, 2016 1	<u>41415</u>
Photo 3-4: Triple Drop Rapid at ~40 cfs May 03, 2016	<u>41415</u>
Photo 3-5: "Ledge 2" in Triple Drop at 1,800 cfs	<u>51516</u>
Photo 3-6: "Hell or Highwater" section at ~40 cfs May 03, 2016 <u>1</u>	<u>51516</u>
Photo 3-7: UDOT Rest Area on I-84 Eastbound Lane	. <u>525</u> 26
Photo 3-8: PacifiCorp Weber Recreation Site at Weber Diversion Dam on I-84 Eastbound I	
Photo 3-9: Parking on South Weber Drive Adjacent to River Take-out2	.6 <u>26</u> 27
Photo 3-10: Gate Obstructing Access to Old Highway from I-84 Westbound Lane2	<u>727</u> 28
Photo 3-11: River Launch Downstream of Weber Diversion Dam2	<u>82829</u>
Photo 3-12: Weber Diversion Dam2	<u>82829</u>
Photo 3-13: Davis-Weber Irrigation Company Dam Obstructing Downstream Navigation 3	<u>030</u> 31
Photo 3-14: Gate Restricting Access to Davis-WeberIrrigation Company Dam Take-out 3	1 3132

List of Acronyms and Abbreviations

CFS Cubic feet per second

FERC Federal Energy Regulatory Commission

MW Megawatt

NRCS National Resource Conservation Service

NWS National Weather Service

Project Weber River Hydroelectric Project, FERC No. 1744

UDOT Utah Department of Transportation

USGS U.S. Geological Survey

1. INTRODUCTION

PacifiCorp's Weber River Hydroelectric Project (Project), Federal Energy Regulatory Commission (FERC) Project No. 1744, is a 3.85 megawatt (MW) hydroelectric project located in northern Utah. It is approximately 30 miles northeast of Salt Lake City and 9 miles southeast of Ogden, Utah, near the mouth of Weber Canyon on the Weber River. The Project was developed in the early 1900s to supply electrical generation to the newly growing communities of the Wasatch Front. The Project's current FERC license will expire on May 31, 2020. This Recreation Study was conducted as part of the Project's relicensing process, with the goal to collect and organize information about recreation use and access in the study reach, with a focus on whitewater recreation use on the 1.9-mile reach of the Weber River between the Weber diversion dam and the powerhouse, where flows are altered by Project operations.

1.1. STUDY OBJECTIVES

The objective of the study is to assess whitewater boating opportunities provided across a range of flow conditions based on the water available in the Weber River downstream of the Weber Hydroelectric Project diversion dam and the river access available to recreationists.

1.2. NEXUS TO PROJECT

The Project reduces stream flows in the 1.9-mile study reach. The Project is subject to minimum instream flows ranging from 34 to 50 cubic feet per second (cfs), depending on the season and water yields in the Weber River watershed.

1.3. PROJECT AREA

The study reach (Figure 1-1) was chosen because it is used by boaters for whitewater recreation. Boaters refer to a 0.3-mile section in the study reach as "Horseshoe Bend" and/or "Scrambled Eggs." The study reach extends from the Weber diversion dam near the Utah Department of Transportation (UDOT) Rest Area, to the Project powerhouse and directly upstream from the Davis-Weber Irrigation Company's headgates and canal intake.

2. METHODS

2.1. WHITEWATER BOATING HYDROLOGY ANALYSIS

The nearest U.S. Geological Survey (USGS) gage (No. 10136500) to the study reach is located at Gateway, Utah, just upstream of the Weber Project diversion dam. The Gateway gage has data available for a period of record that covers 94 years. Data from the Gateway gage was used to calculate the hydrology for the study reach.

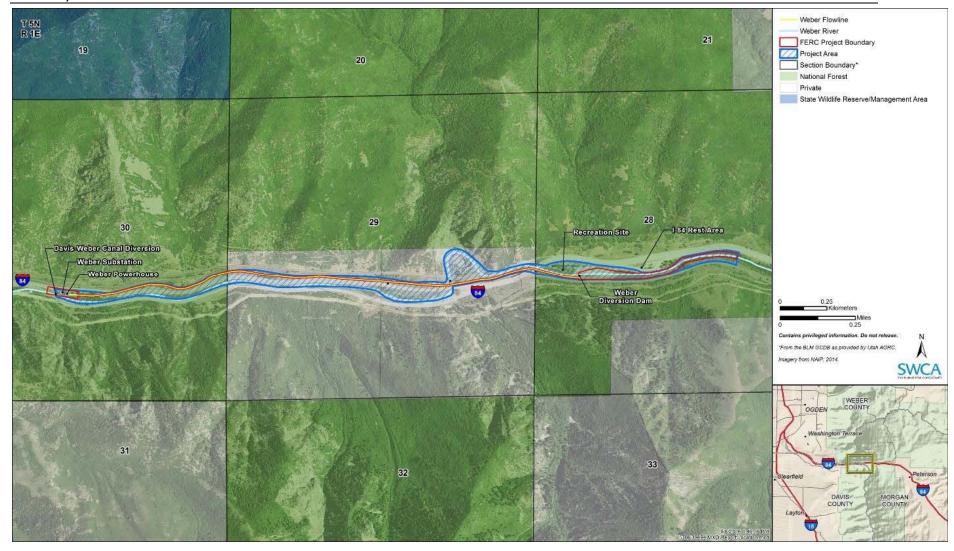


Figure 1-1: Weber River Hydroelectric Project Recreation Study Area

Flows in the study reach downstream of the Weber diversion dam are typically approximately 300 cfs less than flows reported at the Gateway gage when the Project is operating at full capacity. The Project typically operates when flows are above approximately 100 cfs, but is not at full capacity until the river reaches approximately 350 cfs. Hydrology data for the study reach was calculated by PacifiCorp using power generation and the diversion gate flow data for the Project. For the calculations, it was assumed the entire discharge of the Weber River as measured at the Gateway gage was directed into the study reach through the two diversion gates during periods that the Project was offline. During periods of Project operation, the flow in the study reach was calculated using inflow data from the Gateway gage and data for the power flow from operation of the Project and bypass flows from operation of the diversion gates.

Example: 700 cfs (a) Gateway -300 cfs (Project) = 400 cfs bypass flow

Minimum instream flows are maintained in the study reach through the operation of the two diversion gates. Flows in excess of 350 cfs are passed over the diversion into the bypass. Minimum instream flow requirements for the Weber River and the study reach were established in the existing 1990 FERC license, "to protect and enhance the fish and wildlife resources of the Weber River." The current minimum flow requirement is for 34 to 50 cfs. The actual requirement is set annually dependent on the annual spring runoff forecast for the Weber River watershed (Table 2-1). The forecast is based on information from the National Resource Conservation Service (NRCS) and the National Weather Service (NWS), and it includes the following:

- A continuous flow of 34 cfs or all Weber River flow from October 1 March 31, whichever is less; and
- A continuous flow of 34 to 50 cfs from April 1 to September 30, depending on the latest projected runoff forecast of the NRCS and NWS, or all Weber River flow, whichever is less.

Ramping rates are not specified in the Weber River instream flows. Because the Project is run of the river lacking ability to store increased water from upstream sources, flow in the bypass reach generally fluctuates proportionally with the river hydrograph.

Table 2-1: Minimum instream	flow requirements	based on runoff forecast
-----------------------------	-------------------	--------------------------

Runoff forecast (percent of normal runoff)	Required minimum flow (or inflow ¹)		
>=100 %	50 cfs		
69-99 %	34.5 to 49.5 (50 cfs X % of normal)		
<=68 %	34 cfs		

¹ inflow is defined as all Weber River flow

2.2. WHITEWATER BOATING NEEDS ANALYSIS

The whitewater opportunities in the study reach were evaluated using a three-phased approach outlined in Whittaker, Shelby, and Gangemi (2005). An initial desktop effort (Level 1) was performed to gather available information on the resource. A Level 2 field reconnaissance was performed to observe the resource first-hand and meet with whitewater boaters with previous

experience and knowledge of the resource. The information gathered in the Level 1 and Level 2 efforts was analyzed to create more detailed summaries of whitewater use patterns and flow preferences in a Level 3 study effort. The Level 3 effort included deployment of an online survey questionnaire and a focus group session with whitewater boaters familiar with the study reach.

2.2.1.Level 1 Desktop Effort

The Level 1 desktop effort provided information on the whitewater opportunities in the study reach including length, access points, whitewater difficulty, rapid names, recommended navigation routes, flow range, flow information, and safety concerns (American Whitewater 2016).

2.2.2.Level 2 Field Reconnaissance

Identification and documentation of river access for whitewater recreation in the study reach occurred during the Level 2 field reconnaissance events on March θ 1, 2016, and May θ 3, 2016. Members of the Weber River Recreation Study Technical Group participated in the March θ 1, 2016 field reconnaissance. Site visit participants provided information on current and historic access to the river, current and historic use patterns in the study reach, and the range of flows typically boated. River access locations include areas that could be used for activities including parking as well as put-in and take-out locations for boats and equipment. Interviews with Project operators provided information on the timing of flows in the study reach, safety, and access issues.

2.3. WHITEWATER BOATING USE AND DEMAND ANALYSIS

A whitewater survey questionnaire and focus group were administered to assess whitewater boating use and demand.

2.3.1.Level 3 Survey Questionnaire

The Weber River Whitewater Internet survey questionnaire design was based on accepted practices outlined in Whittaker et al. (1993) and Whittaker, Shelby, and Gangemi (2005). The survey included five sections: an introduction, background information about the participant, single-flow evaluations of the flow boated, comparisons with other flows, and recreation access preferences for the study reach. Information gathered from the Level 2 field reconnaissance was used to develop questions for the Internet survey. The draft Internet survey was presented to the Weber River Recreation Technical Group for review and comment. Comments were incorporated into the final survey. A copy of the Internet survey questionnaire is included in Whitewater Report Appendix A.

The survey was posted using Survey Monkey on March 24, 2016, and remained online 102 days through July 4, 2016. Participation was solicited electronically by advertising on PacifiCorp's Project website and forwarding the survey link to members of the boating community along the Wasatch front including individuals representing American Whitewater in the relicense proceeding.

Survey Monkey link: https://www.surveymonkey.com/r/XGKSCHD

PacifiCorp link: http://www.pacificorp.com/es/hydro/hl/weber.html#

2.3.2.Level 3 Focus Group

Survey participants were invited to participate in a focus group session after completing the Internet survey. Contact information was requested for participants interested in attending the upcoming focus group meetings. Individuals that expressed interest via the Internet survey received an email invitation in April 2016 with a reminder and information about the focus group session (Whitewater Report Appendix B). The invitation requested individuals interested in the focus group session register/RSVP for planning purposes.

The focus group session was facilitated by a river professional with direct experience conducting whitewater recreation studies. Background surveys were distributed to focus group participants to collect demographic, residence, and whitewater experience information that could be used for analysis of the data. The facilitator explained the focus group objectives and format to the participants. Next, facilitators reviewed the study reach, described the FERC relicensing process overview and Recreation Study, identified the Project infrastructure, and provided overviews of the watershed, flow regulation and the influence of additional projects on the seasonal hydrograph for the Weber River. The focus group discussion topics were organized into six categories: flow information, parking and river access (current and historic), rapid names and whitewater difficulty, flow preferences (minimum acceptable and optimum), whitewater use patterns, and comparisons with other local whitewater resources. Photographs collected during the Level 2 field reconnaissance along with maps of the study reach were used in the focus group session to generate discussion on specific rapids, whitewater difficulty as well as historic and current river access.

Notes from focus group participants are included in Whitewater Report Appendix C and included throughout the results.

2.3.3. Flow Preferences

The Internet survey prompted participants to rate eight flows in the study reach in 100 cfs increments from 200 cfs to 1,000 cfs using a 5-point acceptability rating scale. A whitewater flow preference curve (flow preference curve) was plotted for whitewater recreation in the study reach using the 5-point acceptability rating scale. Mean values from the Internet survey were plotted using the acceptability rating scale on the y-axis to develop flow preference curves. Mean flow values equal to 3 (marginal) on the flow preference curve were defined as minimum acceptable. Mean flow values greater than 3 were considered acceptable for the participants. For this study, and consistent with Whittaker et al. (1993), the optimum recreational flows include the range of flows beginning at the point in which the curve begins to flatten out and terminates at the point where there is a sharp decline in respondent acceptability ratings. The results of the flow preference curve and analysis for the study reach are described in Section 3.5.

Focus group participants were questioned on their flow preferences for the study reach in the May 3, 2016, focus group session. Participant responses were captured in meeting notes and synthesized in table format for minimum acceptable and optimum flows.

Focus group participants preferred discussing flows based on the Gateway gage rather than the flows present in the study reach because study reach flows must be calculated. For the data analysis in the results section, flow preferences from focus group participants have been

calculated to the flows present in the study reach by subtracting out ~300 cfs. This allowed for comparison with the results from the Internet survey.

3. RESULTS

This section describes the whitewater recreation resource and access in the Project study reach using information and data gathered in the Level 1, 2, and 3 study efforts.

3.1. WHITEWATER BOATING HYDROLOGY ANALYSIS

PacifiCorp analyzed the 94-year hydrologic record at the USGS Gateway gage in the Pre-Application Document as the Water Resources Final Study Plan. The analysis evaluated changes to the hydrology of the study reach over time due to the construction of new water storage and diversion projects upstream of the Project. These additional water storage and diversion projects have resulted in reductions to the mean daily flows in the study reach (Figure 3-1). The largest reduction occurred after the Echo Hydroelectric Project was completed in 1931.

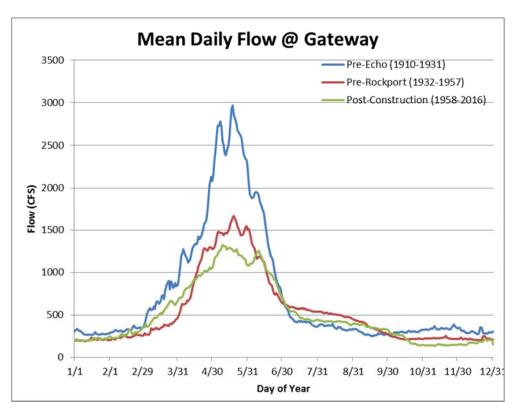


Figure 3-1: Mean Daily Flows at the Gateway gage No. 10136500 (PacifiCorp Final Study Plan Water Resources, 2016)

Due to low inflows, the Project is typically offline in the winter months. During the non-operational periods all flows at Gateway gage pass through the Weber diversion dam and into the study reach. In 2015 and 2016, data from the Gateway gage indicate that no boating opportunities occurred in 2015 and 2016 when the Project was offline (Table 3-1). Minimum acceptable flows in the study reach are discussed in Section 3.2.4. The calculated minimum

acceptable boating flow of 450 cfs in the study reach (or 750 cfs on the Gateway gage during Project operations) is shown as a red line on Figure 3-2 for reference.

Table 3-1. Number of Days with Boating Opportunities 2015-2016 in Project Study Reach

Project constitute	Number of days Flow at				1 10 11 011	Numbe	r of days
Project operations	2015	2016 (thru Sept 30)	Gateway Gage	2015	2016 (thru Sept 30)		
Project Offline	189	57	> 450 cfs	0	0		
Project Operating	176	217	450 - 750 cfs	13	26		
Project Operating			> 750 cfs	1	2		

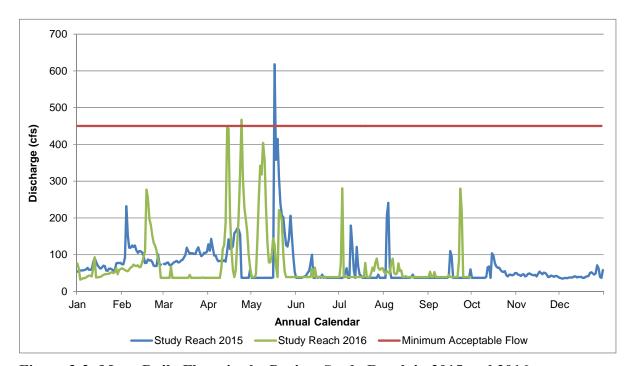


Figure 3-2: Mean Daily Flows in the Project Study Reach in 2015 and 2016

Operation of the Project in 2015 started in late March and continued until mid-October, when the forebay was drained and the radial gates were opened to the total flow of the river. The Project operated for a total of 176 days during 2015. The average flow in the study reach during operation of the Project was 61 cfs, with a minimum flow of 37 cfs, and a maximum of 618 cfs, which occurred on May 17, 2015. The minimum flow of 37 cfs in the study reach occurred during approximately 122 of the 176 days that the Project was operating.

In 2016, operation of the Project started in late February and continued until the end of September (end of the period covered by this report; as of November 9, 2016 the Project is still operating, although at very low generation levels). Between February 26, 2016 and September

30, 2016, the Project operated for a total of 217 days. The average flow in the study reach during operation of the Project in this period was 72 cfs, with minimum flows of 37 cfs (up to April 13, 2016) and 39 cfs (starting April 14, 2016), and a maximum of 467 cfs that occurred on April 24, 2016. Three hydrologic peaks of 400 cfs or greater occurred in the spring of 2016 (April 14-15, April 24, and May 9, 2016). The minimum flows in the study reach occurred during approximately 139 of the 217 days that the Project was operating.

During periods of Project operation, flows greater than 750 cfs are necessary at Gateway gage for a whitewater opportunity in the study reach. Mean daily flow at Gateway gage during operation of the Project was greater than 750 cfs on a single day in 2015 and 2 days in 2016.

Flows at Gateway gage between 450 and 750 cfs during Project operation result in a flow in the study reach less than the minimum acceptable flow for whitewater boating. The number of days when mean daily flows were between 450 and 750 cfs at Gateway gage during operation of the Project was 13 in 2015 and 26 in 2016. Over the total 94-year period of record, days with acceptable flows for whitewater boating generally occurred in April and May.

3.2. WHITEWATER BOATING USE, DEMAND, AND NEEDS ANALYSIS

Information on whitewater use patterns, flow preferences and access was gathered through site visits, boater interviews, the Internet survey and a focus group session. The following section describes the results from these data collection efforts.

3.2.1. Internet Survey and Focus Group Participation

The Internet survey was launched on March 24, 2016, and closed on July 4, 2016. A total of 62 individuals responded to the internet survey with nine incomplete surveys removed from the overall analysis due to incomplete survey responses. An additional 8 surveys were included in the analysis of the background information, but were excluded from the flow analysis due to a lack of responses for flow-related questions. A total of 45 responses were used in the flow analysis for this study. Survey respondents were encouraged to report the results of historic trips on the Horseshoe Bend reach as well as more recent trips. The earliest date for trips reported was November 26, 1976. The range of flows listed for trip reports ranged from 241 cfs to 4,300 cfs, as measured at the Gateway gage.

PacifiCorp hosted a whitewater focus group for the Project on May 3, 2016, from 7:00 PM to 10:00 PM in Ogden, UT. A total of 30 invitations were delivered and 15 individuals registered for the focus session, all of whom participated. A complete list of focus group participants is provided in Appendix D.

Section 1 of the Internet survey gathered background information on the survey respondent. This information was used to characterize the pool of survey respondents using the Project study reach. Similarly, focus group participants were asked to complete the same background questions at the start of the focus group session. This allowed PacifiCorp to compare the pool of participants for the Internet survey group and focus group.

The participants in the Internet survey and the focus group had a similar age distribution (Figure 3-3). Participant age ranged from 20 to 69 years with the majority of the participants in the age category of 30 to 39 years for both groups. The next largest age category for the Internet survey was 20 to 29 years old, followed by 60 to 69 years (Figure 3-3). The age range for focus group

participants was more evenly distributed compared to the Internet survey. Internet survey and focus group participants were predominately male (Figure 3-4). The whitewater skill level for focus group and Internet survey participants included individuals with intermediate, advanced, and expert skills (Figure 3-5). The majority of participants in both groups self-identified as having advanced whitewater skills. The number of years of whitewater paddling for the Internet survey group ranged from 4 to 40 years with an average of 16 years paddling. The focus group years of paddling ranged from 5 to 40 with an average of 19 years. Hardshell kayaks were the predominant watercraft used in the study reach by focus group and Internet survey participants although a small number of participants indicated use of raft, paddle raft, inflatable kayak, and open-canoe (Figure 3-6).

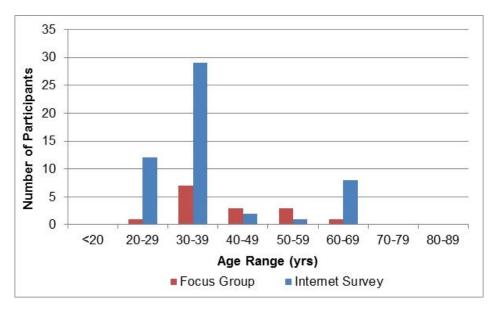


Figure 3-3: Age Distribution for Focus Group and Internet Survey Participants

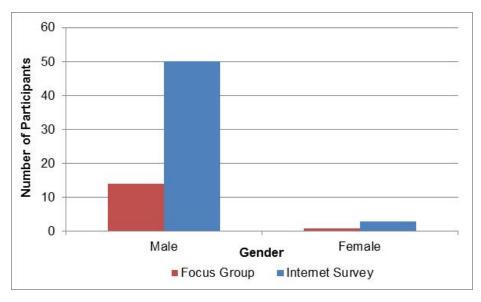


Figure 3-4: Gender of Focus Group and Internet Survey Participants

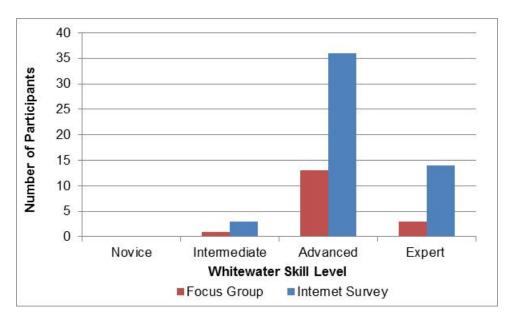


Figure 3-5: Whitewater Skill Level for Focus Group and Internet Survey Participants

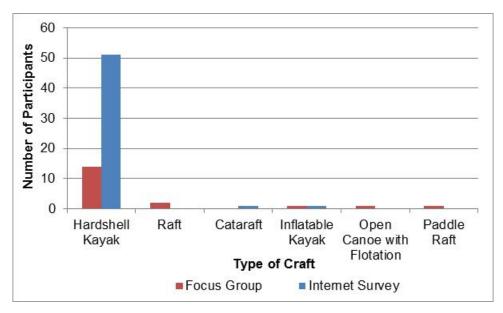


Figure 3-6: Type of Craft used by Focus Group and Internet Survey Participants in the Study Reach

3.2.2. Whitewater Rapids

The overall length of the study reach is approximately 1.9 miles. The whitewater boating community refers to the study reach as Horseshoe Bend and/or Scrambled Eggs, names which also specifically refer to a short (0.3 mile) section of continuous whitewater within the overall study reach that is the primary attraction (Figure 3-7). Within the study reach, the boating community has names for the more prominent rapids as well as the whitewater difficulty of the individual rapids (Table 3.2).

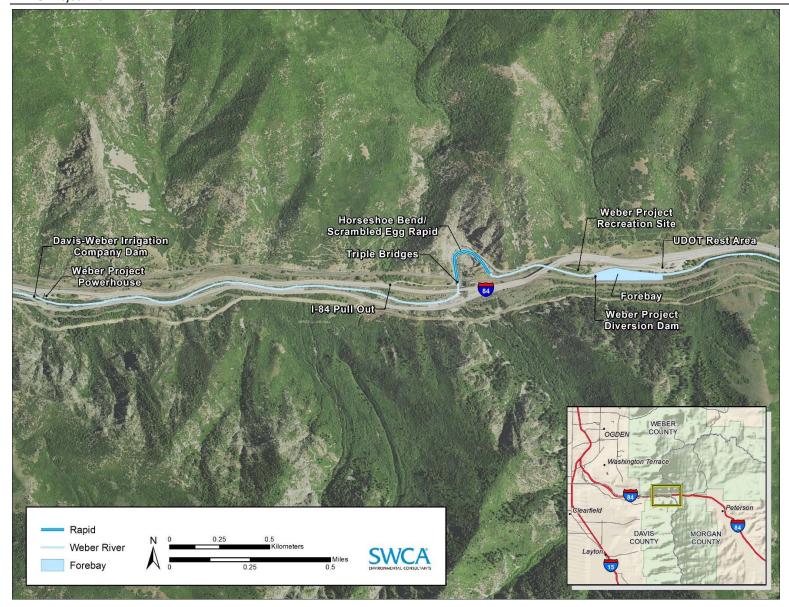


Figure 3-7: Location of Whitewater Rapids within the Project Study Reach

Table 3-2: Whitewater Rapids in the Study Reach

Area	Project Study Reach	Length (miles)	Rapid Names	Focus Group Rating of WW Difficulty ¹
"Pipe" Area	Section of Weber River between Highway 84 Bridge to top of Horseshoe Bend rapid	0.25	Boogey Water	п
Horseshoe Bend (aka Scrambled Eggs)	Section of Weber River from the top of the bend to the railroad bridge	0.25	Upper Section	III (III+ > 700 cfs)
			The Bend	IV (IV+ to V > 2000 cfs)
			Bottom Section	III to IV
Triple Drop	Section of Weber River from the railroad bridge	0.1	Ledge 1	IV (III 200 cfs)
			Ledge 2	IV (III 200 cfs)
			Ledge 3	IV (III 200 cfs)
Hell or High Water	Section between Triple Drop and Weber Powerhouse	1.2	No Defined Rapids	III (IV- >1500 cfs)
Weber-Davis Irrigation Dam to Canyon Mouth ²	Section between Irrigation Dam and South Weber Drive Take-out	0.75	No Defined Rapids	II (IV Portage)

¹International Scale of Whitewater Difficulty

Horseshoe Bend itself is described as three sections: Upper Section (Photo 3-1), the Bend (Photo 3-2) and Bottom Section (Photo 3-3). Triple drop (Photo 3-4) consists of three ledge drops in quick succession: Ledge 1, Ledge 2 (Photo 3-5) and Ledge 3. Boaters refer to the 1.2-mile section below Triple Drop to the Weber Powerhouse as "Hell or High Water" (Photo 3-6) but do not have specific rapid names within that section of the river. Focus group participants commented that this section can have fun Class IV- play water at flows greater than 1,500 cfs. At flow levels less than 1,500 cfs, focus group participants commented that this section is less appealing. In fact, prior to the access restrictions on I-84, most boaters did not paddle below Triple Drop. Similarly, most boaters formerly avoided the 0.25 mile section upstream of Horseshoe Bend, electing instead to put-in at the start of the rapid.

² Downstream and technically outside of Project study area



Photo 3-1: Upper Section on Horseshoe Bend Rapid at ~40 cfs May 4, 2016



Photo 3-2: "The Bend" in Horseshoe Bend at ~2500 cfs



Photo 3-3: Lower Section on Horseshoe Bend Rapid at ~40 cfs May 03, 2016



Photo 3-4: Triple Drop Rapid at ~40 cfs May 03, 2016



Photo 3-5: "Ledge 2" in Triple Drop at 1,800 cfs



Photo 3-6: "Hell or Highwater" section at ~40 cfs May 03, 2016

The majority of Internet survey respondents rated the whitewater difficulty for the Project reach of the Weber River as Class IV whitewater (Figure 3-8). Focus group participants provided more detailed ratings of the whitewater difficulty for the individual rapids across a range of flows. As expected, considerable discussion ensued among the focus group participants regarding the whitewater difficulty for individual rapids at various flows. Individuals more familiar with the reach and with higher skill levels tended to rate the whitewater difficulty lower compared to individuals with less experience. In the end, the focus group participants agreed that the overall rating for the study reach is Class IV, reflecting the difficulty in Horseshoe Bend and Triple Drop rapids.

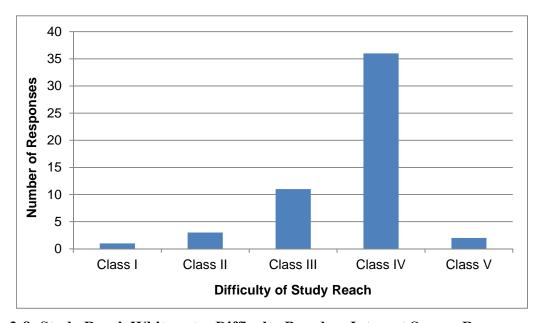


Figure 3-8: Study Reach Whitewater Difficulty Based on Internet Survey Responses

3.2.3. Whitewater Use Patterns

Whitewater boating in the study reach typically occurs during the spring months, corresponding with the melting of the lower elevation snowpack. Boaters take advantage of flows in the Horseshoe Bend section when discharge at the USGS Gateway gage exceeds the Weber diversion dam capacity. In 2015, trips from Internet survey participants occurred in the study reach from March through September with the majority of the trips occurring in May and June. In 2016, the majority of the trips reported occurred in April with a single trip reported for late June. There are no commercial outfitters operating on this reach; none are expected to operate in the future due to the narrow river channel not suitable for rafts, unpredictable pattern of flows suitable for whitewater and challenges with access.

In general, whitewater boaters indicated they made fewer than five trips to the study reach during the previous 12 months (Figure 3-9). In fact, 15 participants indicated they had not paddled the study reach in the previous 12 months, whereas 24 respondents indicated 1-5 trips in the previous 12 months. Two participants indicated making 6-10 trips or 11-20 trips respectively

during the past 12 months. No participants reported making more than 20 trips during the past 12 months.

When asked the total number of trips they have made to the study reach for whitewater recreation, the largest number of Internet survey participants (n=17) indicated 1-5 trips total to the study reach, followed by 12 participants indicating 11-20 total trips, and 11 participants indicating more than 20 total trips.

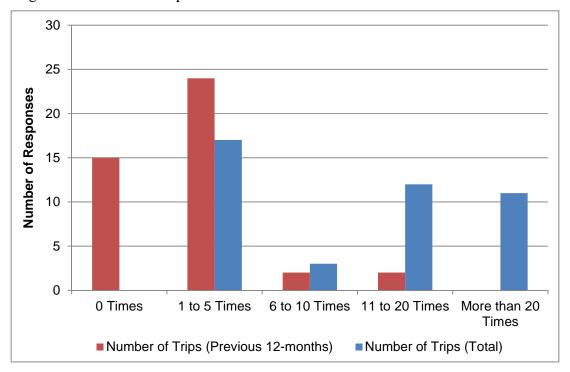


Figure 3-9: Number of Trips to the Study Reach by Internet Survey Participants

Internet survey participants indicate they spend 1 to 2 hours paddling during a typical trip to the study reach (Figure 3-10). Less than ten participants indicated 2 to 4 hours of paddling time and no responses were given to indicate a full day of paddling time. Approximately half of the survey respondents completed a single lap per trip to the study reach while the remainder of the respondents completed multiple laps. Of the 20 Internet survey participants that completed multiple runs, 11 completed two laps, 6 completed three laps, and 1 participant each completed four, five, and six laps (Figure 3-11). Focus group participants traveling longer distances commented they typically complete multiple laps in a single trip compared to boaters from the nearby community of Ogden. Weekends and weekdays after work hours (typically 5 PM) were preferred for trips to the study reach (Figure 3-12). Focus group participants indicated the timing of trips was largely dependent on the flow conditions and further commented that boaters need to be opportunistic in a dry state like Utah. In fact, some focus group participants indicated they would skip work to boat Horseshoe Bend during optimum flow conditions because it occurred infrequently. The number of trips per year is dependent on the availability of flows.

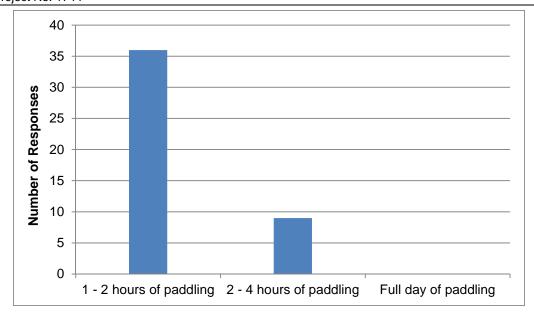


Figure 3-10: Amount of Time Spent Paddling during a Typical Trip through the Study Reach

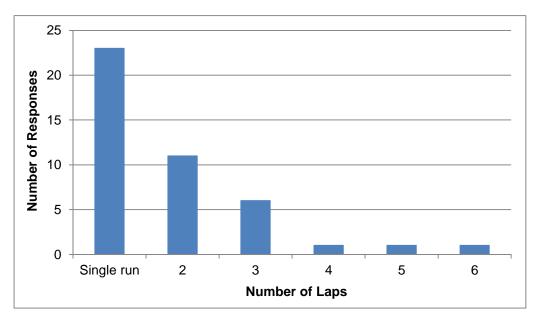


Figure 3-11: Number of Laps during the Reported Trip to the Study Reach

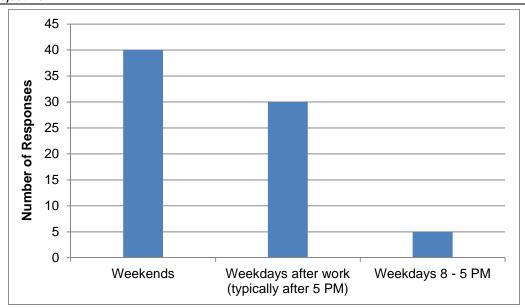


Figure 3-12: Timing of a Typical Whitewater Recreation Trip to the Study Reach

Internet survey participants were asked to rate the quality of the study reach for the following whitewater characteristics: technical boating, whitewater play, powerful hydraulics, and length. Overall, participants rated the study reach as moderately to totally acceptable for technical boating and powerful hydraulics (Figure 3-13). In contrast, this same group rated the reach as unacceptable to marginal for whitewater play and marginal for the length of the run.

Internet survey participants compared the study reach to local, state, and regional whitewater rivers using a five-point rating scale ranging from worse than average to among the very best. The whitewater resources used in the comparison included the Weber River play park, rivers within a one-hour drive, other rivers in Utah/Idaho/Wyoming, and other rivers in the United States. For each comparison, the majority of survey respondents rated the Project study reach worse than average relative to the other whitewater recreation resource comparisons (Figure 3-14). Four survey respondents identified the study reach as among the very best within a 1-hour drive. In general, the unfavorable rating of the Project study reach increased as the geographic radius of the comparison expanded (i.e., other rivers in Utah/Idaho/Wyoming and other rivers in the United States).

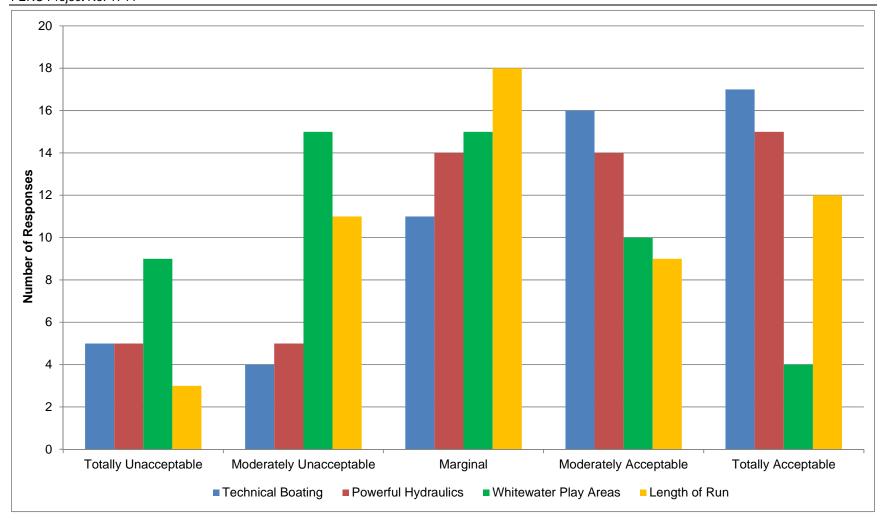


Figure 3-13: Internet Survey Acceptability Rating for Whitewater Features for the Study Reach

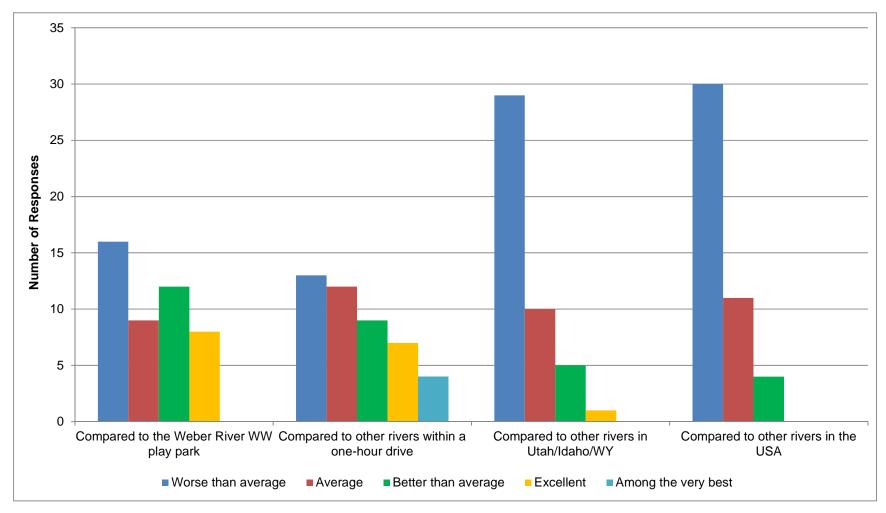


Figure 3-14: Internet Survey Comparison of the Study Reach with Local, Regional, and National Opportunities

3.2.4. Whitewater Flow Preferences

Focus group participants provided information on flow preferences during the May 93, 2016 session. Boaters indicated they rely on the USGS Gateway gage located directly upstream of the Weber diversion dam for real-time flow information. The Gateway gage serves as a reference point since the boaters were not knowledgeable of PacifiCorp's diversion capacity. During the focus group, boaters provided their flow preferences based on the Gateway gage flows. Those numbers have been adjusted to reflect flows in the study reach for comparison with flow recommendations provided by the Internet survey participants.

Section 4 in the Internet survey allowed participants to rate a range of flows from 200 to 1,000 cfs in the study reach. This comparative flow rating was used to develop flow preference curves for the Internet survey participants. The minimum acceptable flow was just under 450 cfs for the Internet survey participant mean responses. The optimum flow range was 600 to 1,000 cfs (Figure 3-15). Participants rated 900 cfs as the most acceptable flow between 200 and 1,000 cfs. The minimum acceptable flow identified in the flow preference curve is consistent with the written response average to Question 17 requesting participants identify their minimum acceptable flow (Table 3-3). Similarly, the optimum flow identified in the flow preference curve was consistent with the written responses average to Question 18 requesting participants identify their optimum flow. Internet survey participants were largely in agreement that flows less than 400 cfs were unacceptable, but as flows increased above 400 cfs the acceptability ratings varied more broadly (Figure 3-16).

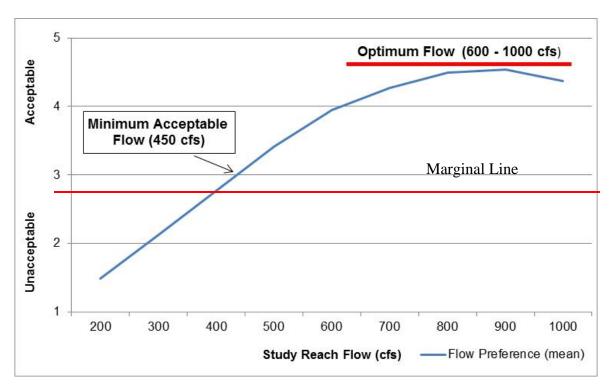


Figure 3-15: Flow Preference Curve Identifying Minimum Acceptable and Optimum Flow for Internet Survey Participants

Table 3-3: Mean Value for Minimum Acceptable and Optimum Flow Written in for the Internet Survey Participants

Minimum Acceptable Flow (cfs)	456
Optimum Flow (cfs)	950

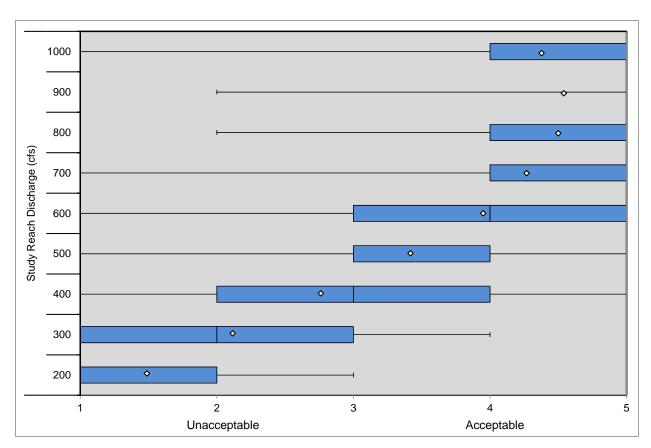


Figure 3-16: Box and Whisker Plot of Flow Comparison Ratings from Internet Survey Participants (\(\delta \) Mean Value)

Focus group participants indicated that flow preferences for the Horseshoe Bend reach are influenced by travel distance, competing boating opportunities, and access. Boaters with shorter travel distances (e.g., from Ogden), typically have a lower flow preference than boaters traveling longer distances from locations such as Salt Lake City. The minimum acceptable flow ranged from 300 to 700 cfs in the bypass with the latter flow identified by boaters with longer driving distance. Optimum flows ranged from 700 to 1,200 cfs, again with the latter flow preferred by individuals traveling from further away. In below-normal precipitation years, flow preference thresholds for minimum acceptable and optimum flows decrease reflecting the limited opportunities available, and more than one focus group participant commented that Utah boaters cannotean't be too picky. Conversely, when other whitewater opportunities are available in the area, boaters prefer higher flows in Horseshoe Bend.

In addition, focus group participants provided flow preferences for high challenge flow opportunities and a standard flow. High challenge flow recommendations ranged from 2,000 to 4,000 cfs. Participants indicated flows have been boated in this range historically (1984 and 2011) during above normal precipitation years when run-off exceeded storage capacity in the upstream reservoirs. These flows were paddled by a smaller pool of expert boaters capable of running continuous Class V rapids. The standard trip flow recommendations were identical to the optimum flow recommendations, 700 to 1,200 cfs.

Focus group participants commented that flow preferences have changed due to the changes in access to Horseshoe Bend. Historically, when access was allowed from I-84 to the bottom of Horseshoe Bend, the minimum acceptable flow was as low as 140 cfs. Boaters would paddle the Horseshoe Bend rapid only because 140 cfs was too low for Ledges 1, 2, and 3 at Triple Drop. Horseshoe Bend at 140 cfs offered a technical slalom boating opportunity. The current access restrictions require a higher minimum acceptable flow because more water is needed to navigate the 1.2-mile Hell or Highwater section downstream of Triple Drop. Focus group participants indicated the flow needed to navigate that section is 300 cfs, but the minimum acceptable flow is closer to 400 cfs for Ogden boaters and higher for boaters traveling longer distances.

3.2.5. River Recreation Access

Information on parking and public access to the study reach was obtained from the Internet survey and focus group. Internet survey participants were queried on the location for river access and parking for each trip to the study reach. Focus group participants provided information on current and historic river access and parking preferences.

Public parking adjacent to the study reach is currently available via the UDOT rest area (Photo 3-7) located immediately upstream from the Project, and the Weber Recreation Area maintained by PacifiCorp located at the diversion (Photo 3-8). Parking is also available approximately 1 mile downstream of the Project powerhouse on South Weber Drive (Photo 3-9). Internet survey responses indicate the UDOT and adjacent Weber Recreation Area were used the most for parking near the put-in, and South Weber Drive at the mouth of the canyon for the take-out (Figure 3-17). Focus group participant access was consistent with the patterns observed for the Internet survey. Some boaters indicate they use the UDOT rest area for parking instead of the Weber Recreation Site. Boaters shuttle a vehicle to the take-out at the mouth of the canyon on South Weber Drive.

There is no other legal public parking adjacent to the study reach between the Weber diversion dam and the Weber powerhouse. Parking on the shoulder of I-84 is prohibited. Vehicles parked on the shoulder of I-84 will be ticketed by the Utah highway patrol. Historically, boaters accessed the old highway from the westbound lane of I-84 directly downstream of the Horseshoe Bend section for parking. In recent times, UDOT gated access to the old highway from the westbound lane (Photo 3-10). Entrance to I-84 from the historic highway does not have a highway on-ramp.

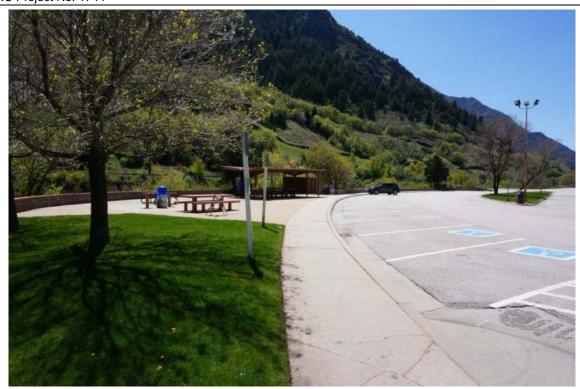


Photo 3-7: UDOT Rest Area on I-84 Eastbound Lane



Photo 3-8: PacifiCorp Weber Recreation Site at Weber Diversion Dam on I-84 Eastbound Lane



Photo 3-9: Parking on South Weber Drive Adjacent to River Take-out

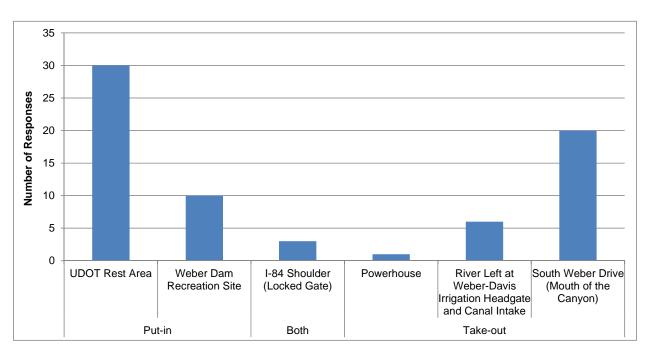


Figure 3-17: Parking Location Frequency for Internet Survey Respondents



Photo 3-10: Gate Obstructing Access to Old Highway from I-84 Westbound Lane

The majority of boaters put-in on the study reach a short distance downstream from the Weber diversion dam where the paved walking path terminates at the riverbank (Figure 3-18). River access is not permitted directly downstream of below the Weber diversion dam for safety and liability reasons. Boaters are able to launch on a gravel bar approximately 200 meters downstream from the dam (Photo 3-11). PacifiCorp employees have observed boaters launching in the Project forebay. One focus group participant communicated they had paddled over the dam in the past. The dam is not suitable for safe navigation (Photo 3-12) and paddling over it is discouraged by PacifiCorp.

The majority of boaters take out on South Weber Drive, also known as the Mouth of the Canyon (Figure 3-19). During the focus group, participants indicated this is the default location currently, but it's it is not preferred because it requires paddling the 1.2 mile Class II-III section, Hell or High Water, below Triple Drop, portaging around the Davis-Weber Irrigation Company Dam and paddling another 0.75 mile Class II section that may be severely dewatered by irrigation flow diversions.



Photo 3-11: River Launch Downstream of Weber Diversion Dam



Photo 3-12: Weber Diversion Dam

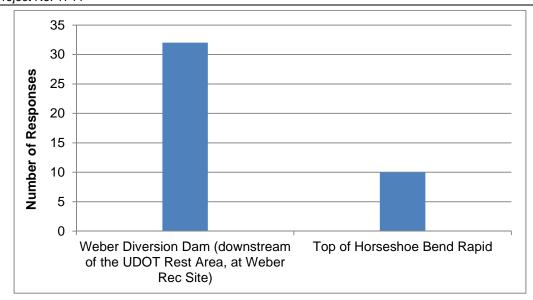


Figure 3-18: Put-in Location for Internet Survey Respondents

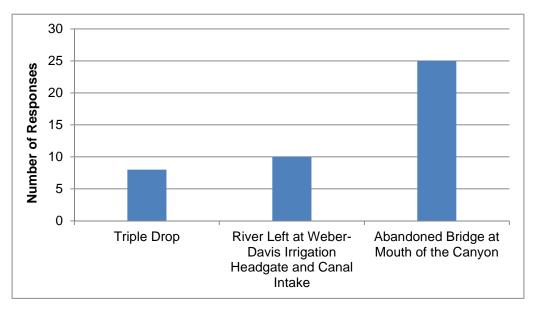


Figure 3-19: Take-out Location for Internet Survey Respondents

Focus group participants indicated that historically they accessed the study reach via the old highway from the westbound lane on I-84. This access point was more convenient because boaters could park in a single location to concentrate their paddling on the preferred Class IV Horseshoe Bend section and Triple Drop without the need to do a vehicle shuttle between the put-in and take-out. Boaters would typically park at the bottom of Horseshoe Bend and walk to the top with their boats. This allowed boaters to take-out at the bottom of Triple Drop and walk a short distance back to their vehicle. The proximity of parking adjacent to Horseshoe Bend was conducive to boaters completing several laps in a 2 hour period.

UDOT eliminated this preferred access location by installing a locked gate restricting access to the old highway from the westbound lane of I-84. Utah Highway Patrol tickets vehicles parked

on the I-84 shoulder, further eliminating walk-in access on the old highway. Focus group participants commented that this loss of access has, in part, caused a decrease in the frequency of use because of the shuttle now required combined with the increased length of the less desirable Class II water and portage around the Davis-Weber Irrigation Company Dam.

The Davis-Weber Irrigation Company Dam obstructs downstream navigation (Photo 3-13). Boaters typically portage on river right. Some boaters paddle through the diversion structure under certain flow conditions. The river right gate was identified as the preferred route to navigate due to the lack of retentive hydraulics and presence of rebar in the river left diversion gate. For periods of time when the diversion gates are closed, river right was identified as the better option to portage around. When operating, the irrigation canal can divert substantial amounts of water, greatly reducing instream flows downstream of below the Davis-Weber Irrigation Company Dam and potentially impairing suitability for navigation.

A potential take-out location exists directly upstream of the Davis-Weber Irrigation Company Dam on river left with vehicle parking. Access to this location via South Weber Drive is currently restricted by a locked gate (Photo 3-14).



Photo 3-13: Davis-Weber Irrigation Company Dam Obstructing Downstream Navigation



Photo 3-14: Gate Restricting Access to Davis-Weber Irrigation Company Dam Take-out

4. **DISCUSSION**

The whitewater study focused on the 1.9-mile section of the Weber River between PacifiCorp's Weber diversion dam and powerhouse. Boaters are attracted to an approximate 0.3 mile section within this 1.9 mile reach, which they call Horseshoe Bend. The Horseshoe Bend section provides Class IV whitewater paddling opportunities. Boaters have been paddling this reach since at least the mid-1970s. Historically, boaters were able to access the Horseshoe Bend section directly, allowing them to concentrate their paddling on the higher gradient and more difficult 0.3-mile section of the study reach. In essence, Horseshoe Bend presented a "Park and Play" whitewater opportunity. However, in the past decade, UDOT restricted direct highway access to Horseshoe Bend. Boaters must now access Horseshoe Bend in a more traditional river running fashion, including an upstream put-in and a downstream take-out. The put-in and take-out locations require a vehicle shuttle. Currently, boaters can park near the diversion and paddle or walk down to the Horseshoe Bend section. The most common take-out location currently is South Weber Drive downstream of the Davis-Weber Irrigation Company Dam and approximately 0.75 mile downstream of below the PacifiCorp powerhouse.

Internet survey participants identified $450 \, \text{cfs}$ as the minimum acceptable flow and an optimum flow range from $600-1000 \, \text{cfs}$. The minimum acceptable flow for focus group participants ranged from $300 \, \text{to} \, 700 \, \text{cfs}$ while the range for optimum flows was $700 \, \text{to} \, 1200 \, \text{cfs}$. Boaters reference the USGS Gateway gage for real-time flow information. Flows at the Gateway gage are approximately $300 \, \text{cfs}$ greater than flows in the Project study reach March through October.

DRAFT Recreation Study Technical Report PacifiCorp's Weber Hydroelectric Project Relicensing FERC Project No. 1744

Flow preferences referenced in this report represent those available in the Project study reach minus Project diversions.

Project operations, particularly in the months of April and May, cause a decrease in the number of whitewater boating opportunities. The Project diverts 300 cfs to the Weber powerhouse when instream flows at Gateway gage range from 450 to 750 cfs resulting in flows less than the minimum acceptable in the Project study reach. Mean daily flows between 450 and 750 cfs at Gateway gage occurred 13 and 26 days respectively in 2015 and 2016. Flows greater than 750 cfs at Gateway gage result in sufficient discharge in the Project study reach for whitewater boating, while the Project is operating. Mean daily flows at Gateway gage exceeded 750 cfs 1 day in 2015 and 2 days in 2016. Focus group participants indicated that flow preferences for the Horseshoe Bend reach are influenced by travel distance, competing boating opportunities, and access. Individuals with a tolerance for lower minimum acceptable flows tended to live in closer proximity to Horseshoe Bend. Boaters traveling longer distances tended to prefer a higher range of flows. Focus group participants indicated that in years with below-normal precipitation, flow preferences decreased due to the limited opportunities locally and regionally. Focus group participants also indicated that the threshold for minimum acceptable and optimum flows is now higher due to the changes in access that require boaters to paddle more of the study reach than the preferred whitewater rapids at Horseshoe Bend. The 1.2-mile section below Triple Drop rapid and the 0.75-mile section downstream of the Davis-Weber Irrigation Company Dam require higher minimum acceptable and optimum flows than Horseshoe Bend. Focus group participants commented that the Horseshoe Bend rapid offers a technical boating opportunity at flows as low as 140 cfs. The current access situation has made it more difficult for boaters to take advantage of these technical boating opportunities due to the requirements to paddle the other sections of the river to reach the take-out location.

During the focus group session, boaters commented that the frequency of use has decreased following UDOT's access restrictions to Horseshoe Bend. According to focus group participants, the current access restrictions require boaters to paddle the full 1.9-mile length of the study reach plus the section of river downstream of the Davis-Weber Irrigation Company Dam. The sections of the study reach directly upstream and downstream contain Class II-III whitewater difficulty compared to Class IV for Horseshoe Bend and Triple Drop rapids. These easier sections require more water to for a quality whitewater recreation experience compared to Horseshoe Bend. The flows needed to run these sections occur with less frequency than the lower flows needed for the Horseshoe Bend section.

Boating the Horseshoe Bend reach now requires two vehicles to shuttle between the put-in and take-out, compared to historical access that allowed boaters to park adjacent to the bottom of the Horseshoe Bend rapid in the middle of the study reach. The need to shuttle vehicles requires advance planning and coordination of schedules with one or more boaters to use the resource. This additional shuttling requirement has caused some focus group participants to lose interest in Horseshoe Bend.

In order to reach the take-out location, boaters typically portage the Davis-Weber Irrigation Company Dam. Under certain conditions when the diversion gates are open, paddlers can run the right hand chute. When the Davis-Weber Irrigation Company Dam is diverting water flows will be reduced substantially downstream compared to the Horseshoe Bend section. This requires boaters to navigate the 0.75 miles to the take-out with flows typically below the minimum acceptable. The combination of the portage and potential for low flow paddling conditions in this

section between the Davis-Weber Irrigation Company Dam and the take-out has led to a decrease in use according to some focus group participants.

Potential access improvements could be implemented at the Project study reach for river recreation users. The historic direct access used by boaters to Horseshoe Bend from I-84 is unlikely to be restored, due to UDOT safety restrictions. Vehicles travel in the west bound lane of I-84 at speeds in excess of 75 miles per hour. Direct access to Horseshoe Bend would require construction of an off and on-ramp to I-84. The site is physically constrained, eliminating the viability of this option. The current put-in location at the Weber Recreation Site is suitable for whitewater boaters to park vehicles and access the river. The current take-out location is not suitable. A more desirable take-out location upstream of the Davis-Weber Irrigation Company Dam is needed so boaters do not need to portage the diversion dam and paddle undesirable low flow conditions to the take-out. A potential parking area is located on river left adjacent to the Davis-Weber Irrigation Company Dam. Boaters could exit the river upstream of the Davis-Weber Irrigation Company Dam and walk a short distance (approximately 200 yards) to their vehicle.

Typically, a recreation needs analysis would include an assessment of the recreation opportunities provided by an unregulated river, and then compare those to what might be available in a post-Project regulated reach. As the study reach is heavily regulated, both by upstream diversions and Project operations, and access to the study area is compromised by the highway that was constructed after the Project was installed, separating impacts to recreation (access, flows, Project operations) to the extent necessary to do a complete needs analysis is not practical. Additionally, due to the run-of-river design and lack of water storage at the Weber Hydroelectric Project, the Project cannot provide flows sufficient to augment recreation opportunities without significantly compromising generation. However, the needs analysis concluded the following:

- Flow-dependent recreation opportunities occur on the Weber River (which is regulated by upstream water storage and diversion projects beyond PacifiCorp's control), including the study reach, infrequently during the spring season;
- These opportunities are hampered by a lack of safe and legal access and egress;
- These limited recreation opportunities are affected by Project operations;
- Opportunities exist to increase the annual frequency of whitewater boating opportunities in the Project study reach when flows at Gateway gage are between 450 and 750 cfs;
- Notification of planned of Project maintenance resulting in increased flow in the study reach could be beneficial to the boating community;
- PacifiCorp could participate in access agreements to improve access at the Davis-Weber Irrigation Company Diversion directly downstream of the Weber powerhouse.

5. REFERENCES

- American Whitewater. 2016. *National River Database*. Accessed: February 2016. Retrieved from: https://www.americanwhitewater.org/content/Wiki/help:rivers:database/
- Whittaker, D., B. Shelby, and J.T. Gangemi. 2005. *Flows and Recreation: A Guide to Studies for River Professionals*. Washington, DC: Hydropower Reform Coalition.
- Whittaker, D., B. Shelby, W. Jackson, and R. Beschta. 1993. *Instream Flows for Recreation: A Handbook on Concepts and Research Methods*. Anchorage, AK: U.S. Department of Interior, National Park Service.